arXiv:1610.01721v1 [math.AP] 6 Oct 2016

# PROPAGATION AND RECOVERY OF SINGULARITIES IN THE INVERSE CONDUCTIVITY PROBLEM

A. GREENLEAF, M. LASSAS, M. SANTACESARIA, S. SILTANEN AND G. UHLMANN

Abstract. The ill-posedness of Calderón's inverse conductivity problem, responsible for the poor spatial resolution of Electrical Impedance Tomography (EIT), has been an impetus for the development of hybrid imaging techniques, which compensate for this lack of resolution by coupling with a second type of physical wave, typically modeled by a hyperbolic PDE. Here we show how, using EIT data alone, to efficiently detect interior jumps and other singularities of the conductivity. Analysis of the complex geometrical optics solutions of Astala and Päivärinta [*Ann. Math.*, **163** (2006)] in 2D makes it possible to exploit an underlying complex principal type structure of the problem. We show that the leading term in a Neumann series is an invertible nonlinear generalized Radon transform of the conductivity. The wave front set of all higher-order terms can be characterized, and, under a prior, some are smoother than the leading term. Numerics indicate that this approach effectively detects inclusions within inclusions via EIT.

*Date*: A.G. is partially supported by DMS-1362271 and a Simons Foundation Fellowship, M.L. and S.S are partially supported by Academy of Finland, G.U. is partially supported by a FiDiPro professorship.

## Contents

1. Introduction 3
2. Complex principal type structure of CGO solutions 9
3. Conductivity equations and CGO solutions 11
4. Fréchet differentiability and the Neumann series 13
4.1. Fréchet differentiability 14
4.2. Neumann series 16
5. Fourier transform and the virtual variable 18
5.1. Microlocal analysis of $\widehat{\omega}_0$ 19
5.2. 'Averages' of $\widehat{\omega}_0$ and artifact removal 23
6. Analysis of $\widehat{\omega}_1$ 24
6.1. Bilinear wavefront set analysis 27
6.2. Bilinear operator theory 30
7. Higher order terms 33
7.1. Multilinear wavefront set analysis 33
8. Parity symmetry 36
9. Multilinear operator theory 38
10. Computational studies 41
10.1. Reconstruction algorithm 41
10.2. High-precision data assumption 41
10.3. Rotationally symmetric cases 42
10.4. Half-moon and ellipse (HME) 42
11. Conclusion 47
References 47

## 1. Introduction

Electrical impedance tomography (EIT) aims to reconstruct the electric conductivity inside a body from active current and voltage measurements at the boundary. In many important applications of EIT, such as medical imaging and geophysical prospecting, the primary interest is in detecting the location of interfaces between regions of inhomogeneous but relatively smooth conductivity. For example, the conductivity of bone is much lower than that of either skin or brain tissue, so there are jumps in conductivity of opposite signs as one transverses the skull.

In this work, a method is introduced for recovering singularities in conductivity from EIT measurements. The method is based on a novel use of the so-called *complex geometrical optics* (CGO) solutions introduced by Sylvester and Uhlmann [70], and it is capable of detecting inclusions within inclusions in an unknown inhomogeneous background conductivity. This property is crucial for one of the main applications motivating this study, namely using EIT for classifying strokes into ischemic (an embolism preventing blood flow to part of the brain) and hemorrhagic (bleeding in the brain); see [36, 35, 59].

EIT can be modeled mathematically using the inverse conductivity problem of Calderón [12]. Consider a bounded, simply connected domain $\Omega \subset \mathbb{R}^n$ with smooth boundary and a scalar conductivity coefficient $\sigma \in L^\infty(\Omega)$ satisfying $\sigma(x) \geq c > 0$ almost everywhere. Applying a voltage distribution $f$ at the boundary leads to the elliptic boundary-value problem

$$\nabla \cdot \sigma \nabla u = 0 \quad \text{in } \Omega, \qquad u|_{\partial\Omega} = f. \tag{1.1}$$

Infinite-precision boundary measurements are then modeled by the Dirichlet-to-Neumann map

$$\Lambda_\sigma : f \mapsto \sigma \frac{\partial u}{\partial \vec{n}}\Big|_{\partial\Omega}, \tag{1.2}$$

where $\vec{n}$ is the outward normal vector of $\partial\Omega$.

In Astala and Päivärinta [6], the construction of the CGO solutions in dimension two was transformed by reducing the conductivity equation to a Beltrami equation. Identify $\mathbb{R}^2$ with $\mathbb{C}$ by setting $z = x_1 + ix_2$ and define a Beltrami coefficient,

$$\mu(z) = (1 - \sigma(z))/(1 + \sigma(z)).$$

Since $c_1 \leq \sigma(z) \leq c_2$, we have $|\mu(z)| \leq 1 - \epsilon$ for some $\epsilon > 0$. Further, if we assume $\sigma \equiv 1$ outside some $\Omega_0 \subset\subset \Omega$, then $\operatorname{supp}(\mu) \subset \overline{\Omega_0}$. Now consider the unique solution of

$$\bar\partial_z f_\pm(z,k) = \pm\mu(z)\overline{\partial_z f_\pm(z,k)}; \qquad e^{-ikz} f_\pm(z,k) = 1 + \omega^\pm(z,k), \tag{1.3}$$

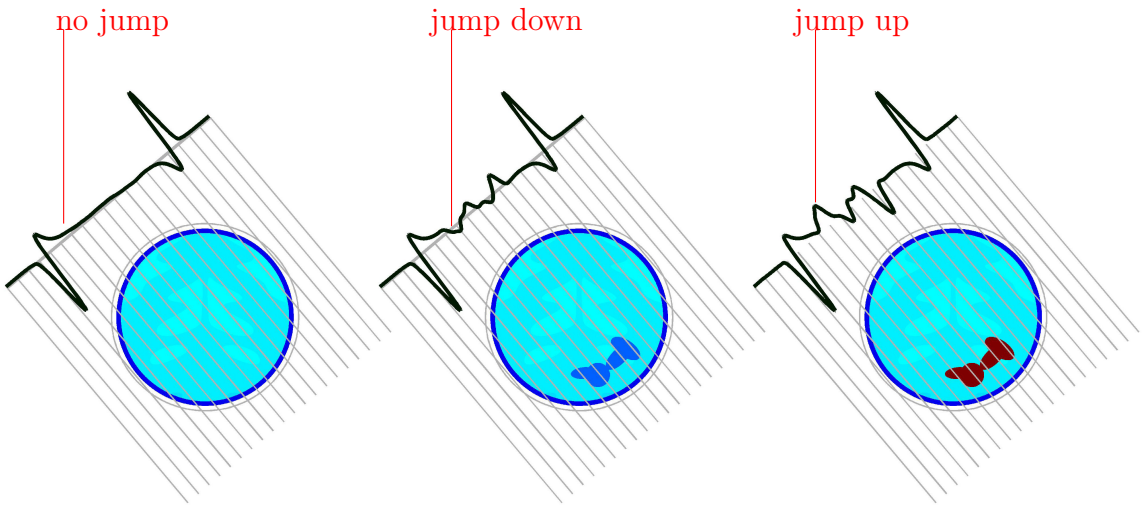


FIGURE 1. The method provides information about inclusions within inclusions in an unknown inhomogeneous background. Jump singularities in the conductivity show up in the function values much like in parallel-beam X-ray tomography: recording integrals along parallel lines over the coefficient function. Figures illustrate this using stroke-like computational phantoms. **Left:** Intact brain. Dark blue ring, with low conductivity, models the skull. **Middle:** Ischemic stroke, or blood clot preventing blood flow to the dark blue area. The conductivity in the affected area is lower than background. **Right:** Hemorrhagic stroke, or bleeding in the brain. The conductivity in the affected area is higher than background. The function shown is $T^{a,+}\mu(t/2, e^{i\varphi}) - T^{a,-}\mu(t/2, e^{i\varphi})$, and $\varphi$ indicates a direction perpendicular to the virtual "X-rays."

where $ikz = ik(x_1 + ix_2)$ and $\omega^{\pm}(z,k) = \mathcal{O}(1/|z|)$ as $|z| \to \infty$. Here $z$ is considered as a spatial variable and $k \in \mathbb{C}$ as a spectral parameter. We note that $u = \mathrm{Re} f_+$ satisfies (1.1).

The crucial new idea we present here is to apply a partial Fourier transform in the radial direction of $k$. We write $k = \tau e^{i\varphi}$ and define

$$\widehat{\omega}^{\pm}(z, t, e^{i\varphi}) = \mathcal{F}_{\tau\to t}\big(\omega^{\pm}(z, \tau e^{i\varphi})\big). \tag{1.4}$$

Singularities in $\sigma$ can be detected from averaged versions of $\omega^{\pm}$, denoted $\widehat{\omega}^{a,\pm}$, as shown in Figure 1. Although the operators taking $\mu$ to $\omega^{\pm}$ and $\widehat{\omega}^{a,\pm}$ have the same microlocal geometry, for appropriate choice

of $a(\cdot)$ the symbol of $\mu \mapsto \widehat{\omega}^{a,\pm}$ results in fewer artifacts and better reconstruction.

Recall that the traces of CGO solutions, and thus $\widehat{\omega}^{a,\pm}$, can be recovered perfectly from $\Lambda_\sigma$ [6, 5] and approximately from practical EIT data [3]. Figure 1 suggests that what we can recover resembles parallel-beam X-ray projection data of the singularities of $\sigma$. Indeed, we derive reconstruction formulae for $\sigma$ analogous to the classical filtered back-projection method of X-ray tomography.

Formally one can view the Beltrami equation (1.3) as a scattering equation, where $\mu$ is considered as a compactly supported scatterer and the "incident field" is the constant function 1. Consider a "scattering series" for the unaveraged $\omega^\pm$,

$$\omega^\pm = \sum_{j=0}^{\infty} \omega_j^\pm \tag{1.5}$$

and set $\widehat{\omega}_j^\pm = \mathcal{F}_{\tau\to t}\omega_j^\pm$ as in (1.4). A rigorous analysis of the two first terms $\widehat{\omega}_0^\pm$ and $\widehat{\omega}_1^\pm$ is provided below. Furthermore, the rest of the expansion (1.5) can be organized as a convergent series. The derivation of (1.5) makes uses the numerically efficient modification by Huhtanen and Perämäki [39] of the CGO construction in [6].

Let $X = \{\mu \in L^\infty(\Omega);\ \text{ess supp}(\mu) \subset \Omega_0,\ \|\mu\|_{L^\infty(\Omega)} \leq 1 - \epsilon\}$, recalling that $\Omega_0 \subset\subset \Omega$. The expansion in (1.5) comes from the following:

**Theorem 1.1.** *The nonlinear operator $W_k : X \to L^2(\Omega)$, defined by*

$$W_k^\pm(\mu) = \omega_\mu^\pm(\,\cdot\,, k)$$

*has Fréchet derivatives, denoted by $D^j W_k|_\mu$, of all orders $j \in \mathbb{N}$ at $\mu \in X$ and the multiple scattering terms in (1.5) are given by*

$$\omega_j^\pm = D^j W_k^\pm|_0(\mu, \mu, \ldots, \mu). \tag{1.6}$$

*The j-th order scattering operators,*

$$T_j^\pm : \mu \mapsto \widehat{\omega}_j^\pm := \mathcal{F}_{\tau\to t}(\omega_j^\pm(z, \tau e^{i\varphi})), \quad z \in \partial\Omega,\ t \in \mathbb{R},\ e^{i\varphi} \in \mathbb{S}^1, \tag{1.7}$$

*are generalized Fourier integral operators whose wave-front relations can be explicitly computed (see formulas (5.6) and (5.7) for the case $j = 0$ and (4.14) for $j \geq 1$).*

Singularity propagation for the first order term $\widehat{\omega}_0^\pm$ is described by a Radon-type transform and a filtered back-projection formula.

**Theorem 1.2.** *Define averaged operators $T_j^{a,\pm}$ for $j = 1, 2, 3, \dots$ and $T^{a,\pm}$ by the complex contour integral,*

$$T_j^{a,\pm}\mu(t, e^{i\varphi}) = \frac{1}{2\pi i}\int_{\partial\Omega} \widehat{\omega}_j^{\pm}(z, t, e^{i\varphi})dz, \tag{1.8}$$

$$T^{a,\pm}\mu(t, e^{i\varphi}) = \frac{1}{2\pi i}\int_{\partial\Omega} \widehat{\omega}^{\pm}(z, t, e^{i\varphi})dz, \tag{1.9}$$

*with $\omega_j^{\pm}$ defined via formulas (1.6)–(1.7) and $\omega^{\pm}$ defined via (1.3). Then we have*

$$(-\Delta)^{-1/2}(T_0^{a,\pm})^* T_0^{a,\pm}\mu = \mu. \tag{1.10}$$

Theorem 1.2 suggests an approximate reconstruction algorithm:

- Given $\Lambda_\sigma$, follow [3, Section 4.1] to compute both $\omega^+(z, k)$ and $\omega^-(z, k)$ for $z \in \partial\Omega$ by solving the boundary integral equation derived in [5]. In practice this can only be done in a disc $|k| < R$ with $R$ depending on measurement noise amplitude.
- Introduce polar coordinates in the spectral variable $k$ and compute the partial Fourier transform, $\widehat{\omega}^{\pm}(z, t, e^{i\varphi})$. In practice the Fourier transform needs to be windowed.
- Using the operator $T^{a,\pm}$ defined in (1.9), we compute $\widetilde{\mu}^+ := \Delta^{-1/2}(T_0^{a,+})^* T^{a,+}\mu$ and $\widetilde{\mu}^- := \Delta^{-1/2}(T_0^{a,-})^* T^{a,-}\mu$.
- Reconstruct by $\sigma = (\mu - 1)/(\mu + 1) \approx (\widetilde{\mu} - 1)/(\widetilde{\mu} + 1)$, where $\widetilde{\mu} = (\widetilde{\mu}^+ - \widetilde{\mu}^-)/2$.

See the middle column of Figure 2 for an example.

One can also use the identity $(T_0^{a,\pm})^* T_0^{a,\pm} = (-\Delta)^{1/2}$ to enhance the singularities in the reconstruction. This is analogous to $\Lambda$-tomography in the context of linear X-ray tomography [19, 20]. See the right-most column in Figure 2 for reconstructions using the operator $(T_0^{a,\pm})^* T^{a,\pm}$.

Our general theorem on singularity propagation is quite technical. Therefore we illustrate it here using a simple example only, and postpone the precise statement and proof to Section 7 below.

Assume that the conductivity satisfies $\sigma(x) = \sigma(|x|)$ and is smooth apart from a jump along the circle $|x| = \rho$. Fix $\varphi = 0$. Then we know some properties of the wavefront set of $\widehat{\omega}_{2n}^{\pm}$. Define hypersurfaces

$$\Pi_n = \{(x, t) \in \mathbb{R}^2 \times \mathbb{R} : \ t = 2\rho n\}, \quad \text{for odd } n,$$
$$\Pi_n = \{(x, t) \in \mathbb{R}^2 \times \mathbb{R} : \ t + 2x_1 = 2\rho n\}, \quad \text{for even } n.$$

Outside the support of $\mu$, we will see that

$$\text{sing supp}(\widehat{\omega}_{2n}^{\pm}) \cap \{(x, t);\ |x| \geq 1\} \subset \bigcup_{p=-n-1}^{n+1} \Pi_{2p}.$$

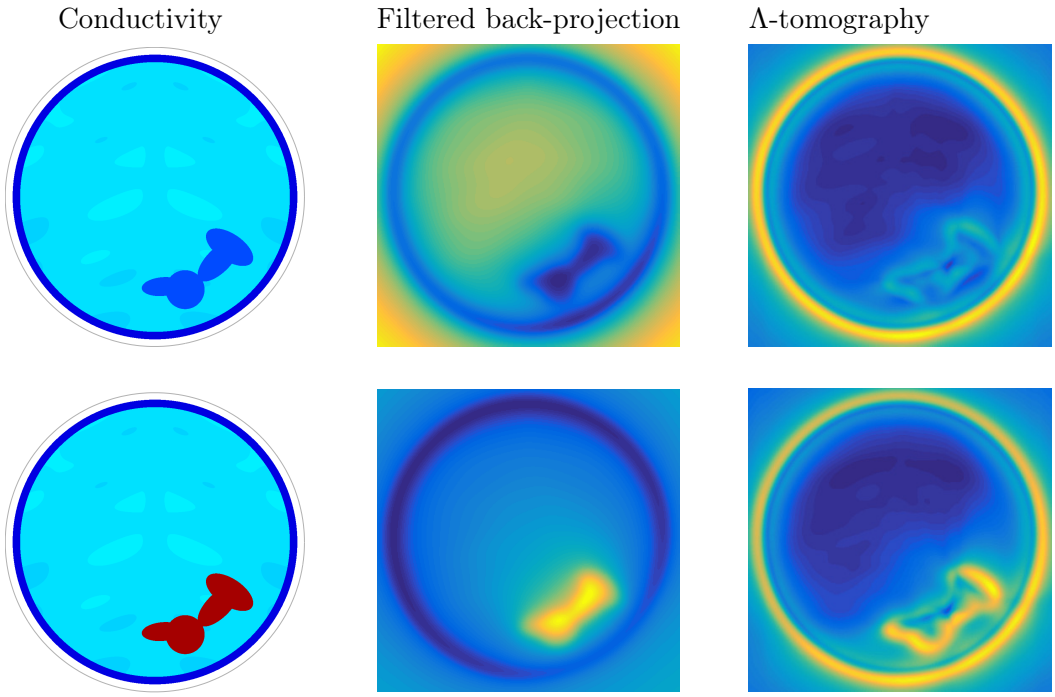


FIGURE 2. Reconstructions, of computational phantoms modeling ischemic (top row) and hemorrhagic (bottom row) strokes, from very high precision simulated EIT data. The results are promising for portable, cost-effective classification of strokes without use of ionizing radiation.

Similar results hold for $\widehat{\omega}^{\pm}_{2n+1}$. However, in the context of EIT it turns out that subtracting the plus and minus terms will cancel out $\widehat{\omega}^{\pm}_{2n+1}$, so their singularities can be ignored. See Figure 3 for a diagram of singularity propagation in the case $\rho = 0.2$.

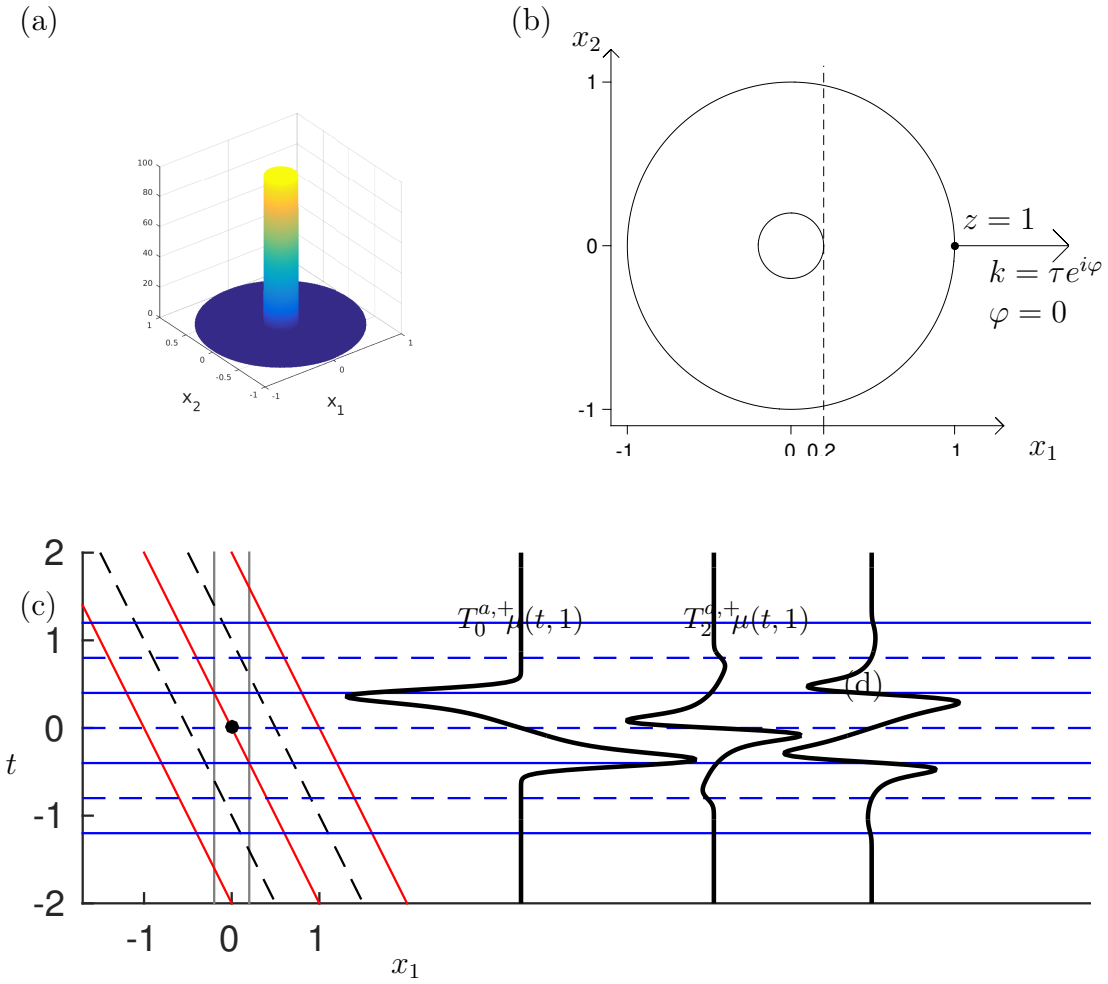


FIGURE 3. (a) Three-dimensional plot of the conductivity having a jump along the circle with radius $\rho = 0.2$ and center at the origin. (b) Unit disc and singular support of the conductivity in the $(x_1, x_2)$ plane. (c) The term $T_0^{a,+}\mu(t,1)$ has peaks, indicated by blue arrows, at $t = \pm 2\rho$ corresponding to the locations of the main singularities in $\mu$, as expected by Theorem 1.2. The higher-order term $T_2^{a,+}\mu(t,1)$, smaller than $T_0^{a,+}\mu(t,1)$ in amplitude, exhibits singularities caused by reflections at both $t = \pm 2\rho$ and $t = \pm 4\rho$. (d) The singularities of the term $T_2^{a,+}\mu(t,1)$ at $t = \pm 4\rho$ are very small. Shown is the zoom-in near $t = 4\rho$, with amplitude increased by a factor of 70.

How does the new method compare to previous work?

Many methods have been proposed for regularized edge detection from EIT data. Examples include the *enclosure method* [41, 43, 11, 42, 40, 72], the *factorization method* [49, 11, 57, 58], the *monotonicity method* [33, 34]. These methods can only detect the outer boundary of an inclusion in conductivity, whereas the method described here, which exploits the propagation of singularities for complex principal type operators, can see nested jump curves. Also, the proposed method can deal with multiple inclusions with conductivity jumping both up and down.

One can also attempt edge detection based on EIT algorithms originally designed for reconstructing the full conductivity distribution. There are two main approaches: sharpening blurred EIT images in data-driven post-processing [31, 32], and applying sparsity-promoting inversion methods such as total variation regularization [17, 47, 68, 14, 16, 71, 74, 46, 21, 75]. As of now, the former approach does not have rigorous analysis available. Some of the latter kind of approaches are theoretically capable of detecting nested inclusions. However, in variational regularization there is a typical instability issue where a large low-contrast inclusion may be represented by a smaller high-contrast feature in the reconstruction. Numerical evidence suggests that our new method can locate jumps robustly for a wide variety of jump amplitudes in the conductivity.

## 2. Complex principal type structure of CGO solutions

We start by describing the microlocal geometry underlying the exponentially growing, or so-called *complex geometrical optics (CGO)*, solutions to the conductivity equation on $\mathbb{R}^n$, $n \geq 2$,

$$\nabla \cdot \sigma \nabla u(x) = 0, \quad x \in \mathbb{R}^n, \tag{2.1}$$

originating in [70]. For complex frequencies $\zeta \in \mathbb{C}^n$, $\zeta \cdot \zeta = 0$, $\zeta = \zeta_R + i\zeta_I = \tau\eta$, with $\tau \in \mathbb{R}$, $\eta \in \mathbb{S}^{2n-1}$, consider solutions of the form

$$u(x) := e^{i\zeta\cdot x} w(x,\tau) = e^{i\tau\eta\cdot x} w(x,\tau).$$

Physically speaking, $\tau$ can be considered as a spatial frequency, with the voltage on the boundary $\partial\Omega$ oscillating at length scale $\tau^{-1}$.

The conductivity equation (2.1) becomes

$$\begin{aligned} 0 &= \frac{1}{\sigma}\nabla\cdot\sigma\nabla u(x) \\ &= \frac{1}{\sigma}\nabla\cdot\sigma\nabla(e^{i\tau\eta\cdot x}w(x,\tau)) \\ &= (\Delta + (\frac{1}{\sigma}\nabla\sigma)\cdot\nabla)(e^{i\tau\eta\cdot x}w(x,\tau)) \\ &= \left(\Delta w(x,\tau) + 2i\tau\eta\cdot\nabla w(x,\tau) + (\frac{1}{\sigma}\nabla\sigma)\cdot(\nabla + i\tau\eta)w(x,\tau)\right)e^{i\tau\eta\cdot x}. \end{aligned}$$

Hence, we have

$$\Delta w(x,\tau) + 2i\tau\eta\cdot\nabla w(x,\tau) + (\frac{1}{\sigma}\nabla\sigma)\cdot(\nabla + i\tau\eta)w(x,\tau) = 0.$$

Taking the partial Fourier transform $\widehat{w}$ in the $\tau$ variable and denoting the resulting dual variable by $t$, which can be thought of as a "pseudo-time," one obtains

$$\Delta\widehat{w}(x,t) - 2\eta\frac{\partial}{\partial t}\cdot\nabla\widehat{w}(x,t) + (\frac{1}{\sigma}\nabla\sigma)\cdot(\nabla - \eta\frac{\partial}{\partial t})\widehat{w}(x,t) = 0.$$

The principal part of this equation is given by the operator

$$\widetilde{\Box} = \mathcal{P}_R + i\mathcal{P}_I = \Delta - 2\eta\frac{\partial}{\partial t}\cdot\nabla$$

where

$$\begin{aligned} \mathcal{P}_R &= \Delta - 2\eta_R\frac{\partial}{\partial t}\cdot\nabla, \\ \mathcal{P}_I &= -2\eta_I\frac{\partial}{\partial t}\cdot\nabla. \end{aligned}$$

With $\xi$ the variable dual to $x$, the full symbols of $\mathcal{P}_R$ and $\mathcal{P}_I$ are

$$p_R(x,t,\xi,\tau) = -\xi^2 + 2\tau\eta_R\cdot\xi, \quad p_I(x,t,\xi,\tau) = 2\tau\eta_I\cdot\xi,$$

and these commute in the sense of Poisson brackets: $\{p_R, p_I\} = 0$. Furthermore, on the characteristic variety

$$\begin{aligned} \Sigma &:= \{(x,t,\xi,\tau)\in\mathbb{R}^3\times(\mathbb{R}^3\setminus\{0\});\ p_R(x,t,\xi,\tau) = 0,\ p_I(x,t,\xi,\tau) = 0\} \\ &= \{(x,t,\xi,\tau)\in\mathbb{R}^3\times(\mathbb{R}^3\setminus\{0\});\ |\xi|^2 - 2\tau\eta_R\cdot\xi = 0,\ 2\tau\eta_I\cdot\xi = 0\} \\ &= \{(x,t,\xi,\tau)\in\mathbb{R}^2\times\mathbb{R}\times\mathbb{R}^2\times(\mathbb{R}\setminus\{0\});\ \xi = 2\tau\eta_R \text{ or } \xi = 0\}, \end{aligned}$$

the gradients $dp_R = (-2\xi + 2\tau\eta_R, 2\eta_R\cdot\xi)$ and $dp_I = (2\tau\eta_I, 2\eta_I\cdot\xi)$ are linearly independent. Furthermore, no bicharacteristic leaf (see below) is trapped over a compact set. Thus, $\widetilde{\Box} = \mathcal{P}_R + i\mathcal{P}_I$ is a complex principal type operator.

Recall that for a *real* principal type operator, such as $\partial/\partial x_1$ in $\mathbb{R}^n$, $n \geq 2$, or the d'Alembertian wave operator, the singularities propagate along curves (the characteristics). For instance, for the wave equation, singularities propagate along light rays. *Complex* principal type operators, such as $\partial_{x_1} + i\partial_{x_2}$ in $\mathbb{R}^n$, $n \geq 3$, or the operator $\widetilde{\Box}$ above, also propagate singularities, but now along *two* dimensional surfaces, called leaves, which are the spatial projections of the bicharacteristic surfaces formed by the joint flowout of $H_{p_R}$, $H_{p_I}$. For the operator $\widetilde{\Box}$ above, this roughly means that if $\widetilde{\Box}\widehat{w}(x,t) = \widehat{f}(x,t)$ and $(x_0, t_0, \xi_0, \tau_0) \in \Sigma$ is in the wave front set of $\widehat{f}(x,t)$, then the wave front set of $\widehat{w}(x,t)$ contains a plane through this point, and in fact this plane reaches all points $x \in \mathbb{R}^2$. Thus, boundary measurements may be made at *any* point on the boundary. We will see below that although this is the case, using suitable weighted integrals over the boundary produces far superior imaging; however, this is due to the amplitudes, not the underlying geometry.

For the remainder of the paper, we limit ourselves to the Calderón problem in $\mathbb{R}^2$; we begin by recalling the complex Beltrami equation formalism and CGO solutions of [6], as well as their modification in [39].

## 3. Conductivity equations and CGO solutions

On a domain $\Omega \subset \mathbb{R}^2 = \mathbb{C}$, let $\sigma \in L^\infty(\Omega)$ be a strictly positive conductivity, $\sigma \equiv 1$ near $\partial\Omega$, and extended to be $\equiv 1$ outside of $\Omega$. As usual in 2D, we may parametrize the complex frequencies $\zeta$ with $\zeta \cdot \zeta = 0$ by $\zeta = (k, ik)$, $k \in \mathbb{C}$, so that, with $z = x_1 + ix_2$, one can write $\zeta \cdot x = kz$. Following Astala and Päivärinta [6], consider simultaneously the conductivity equations for the two scalar conductivities $\sigma$ and $\sigma^{-1}$,

$$\nabla \cdot \sigma \nabla u_1 = 0, \qquad u_1 \sim e^{ikz}, \tag{3.1}$$

$$\nabla \cdot \sigma^{-1} \nabla u_2 = 0, \qquad u_2 \sim e^{ikz}. \tag{3.2}$$

The complex geometrical optics (CGO) solutions of [6] are specified by their asymptotics $u_j \sim e^{ikz}$, meaning that for all $k \in \mathbb{C}$,

$$u_j(z,k) = e^{ikz}\big(1 + \mathcal{O}(\frac{1}{z})\big), \text{ as } |z| \to \infty. \tag{3.3}$$

The CGO solutions are constructed via the ($\mathbb{R}$-linear) Beltrami equation,

$$\overline{\partial}_z f_\mu = \mu\, \overline{\partial_z f_\mu}, \tag{3.4}$$

where the Beltrami coefficient $\mu$ is defined in terms of $\sigma$ by

$$\mu := \frac{1-\sigma}{1+\sigma}. \tag{3.5}$$

$\mu$ is a compactly supported, $(-1,1)$-valued function and, due to the assumption that $0 < c_1 \leq \sigma \leq c_2 < \infty$, one has $|\mu| \leq 1 - \epsilon$ for some $\epsilon > 0$. It was shown in [6] that (3.4) has solutions, for coefficients $\mu$ and $-\mu$, resp., of the form

$$\begin{aligned} f_\mu(z,k) &= e^{ikz}(1+\omega^+(z,k)) \\ f_{-\mu}(z,k) &= e^{ikz}(1+\omega^-(z,k)) \end{aligned} \tag{3.6}$$

with

$$\omega^\pm(z,k) = \mathcal{O}(\frac{1}{|z|}) \text{ as } |z| \to \infty.$$

The various CGO solutions are then related by the equation

$$2u_1(z,k) = f_\mu(z,k) + f_{-\mu}(z,k) + \overline{f_\mu(z,k)} - \overline{f_{-\mu}(z,k)}, \tag{3.7}$$

which follows from the fact that the real part of $f_\mu(z,k)$ solves the equation (3.1), while the imaginary part solves (3.2).

In this work we will mainly focus on $\omega^+$, henceforth denoted simply by $\omega$; however, we will use $\omega^-$ in the symmetry discussion in Sec. 8. Both of these can be extracted from voltage/current measurements for $\sigma$ at the boundary, $\partial\Omega$, as encoded in the Dirichlet-to-Neumann (DN) map of (3.1). For the most part we will suppress the superscripts $\pm$, with it being understood in the formulas that for $\omega^\pm$, one uses $\pm\mu$.

Huhtanen and Perämäki [39] introduced the following modified construction of $\omega$, which, by avoiding issues caused by the exponential growth in the $k^\perp$ directions, is highly efficient from a computational point of view. Let $e_k(z) := \exp(i(kz + \overline{k}\overline{z})) = \exp(i2\mathrm{Re}\,(kz))$; note that $|e_z(z)| \equiv 1$ and $\overline{e_k} = e_{-k}$. Define (as in [5, 6])

$$\nu(z,k) := e_{-k}(z)\mu(z), \text{ and } \alpha(z,k) := -i\overline{k}e_{-k}(z)\mu(z). \tag{3.8}$$

Both $\alpha$ and $\nu$ are compactly supported in $\Omega$; since $\overline{\partial}\omega = \nu\overline{\partial\omega} + \alpha\overline{\omega} + \alpha$, we see that $\overline{\partial}\omega$ is compactly supported as well. For future use, also note that

$$\overline{\nu}(z,k) = e_k(z)\mu(z) \quad \text{and} \quad \overline{\alpha}(z,k) = ike_k(z)\mu(z). \tag{3.9}$$

It was shown in [6, eqn.(4.8)] that $\omega(z,k)$ satisfies the inhomogeneous Beltrami equation,

$$\overline{\partial}\omega - \nu\overline{\partial\omega} - \alpha\overline{\omega} = \alpha, \tag{3.10}$$

where the Cauchy-Riemann operator $\overline{\partial}$ and derivative $\partial$ are taken with respect to $z$. Recall the (solid) Cauchy transform $P$ and Beurling

transform $S$, defined by

$$Pf(z) = -\frac{1}{\pi}\int_{\mathbb{C}} \frac{f(z_1)}{z_1 - z}\, d^2 z_1, \tag{3.11}$$

$$Sg(z) = -\frac{1}{\pi}\int_{\mathbb{C}} \frac{g(z_1)}{(z_1 - z)^2}\, d^2 z_1, \tag{3.12}$$

which satisfy $\overline{\partial} P = I$, $S = \partial P$ and $S\overline{\partial} = \partial$ on $C_0^\infty(\mathbb{C})$.

It is shown in [39], using the results of [6], that (3.10) has a unique solution $\omega \in W^{1,p}(\mathbb{C})$ for $2 < p < p_\epsilon := 1 + \frac{1}{1-\epsilon}$, where $\epsilon > 0$ is such that $|\mu| \leq 1 - \epsilon$. Now define $u$ on $\Omega$ by $\overline{u} = -\overline{\partial}\omega$; note that $u \in L^p(\Omega)$, $\omega = -P\overline{u}$ and $\partial\omega = -S\overline{u}$. Re-expressing (3.10) in terms of $u$ leads to

$$-\overline{u} - \nu\overline{(-S\overline{u})} - \alpha\overline{(-P\overline{u})} = \alpha.$$

Using (3.8), this further simplifies to

$$u + (-\overline{\nu}S - \overline{\alpha}P)\overline{u} = -\overline{\alpha}, \tag{3.13}$$

which then can be expressed as the integral equation,

$$(I + A\rho)u = -\overline{\alpha}, \tag{3.14}$$

where $\rho(f) := \overline{f}$ denotes complex conjugation and $A := (-\overline{\alpha}P - \overline{\nu}S)$. As shown in [6] and [39, Sec. 2], $I + A$ is invertible on $L^p(\Omega)$. Denote by $U(k, \mu) = u(\,\cdot\,, k)|_\Omega$ the restriction to $\overline{\Omega}$ of the unique solution to (3.14), and hence (3.13).

## 4. Fréchet differentiability and the Neumann series

We now come to the key construction of the paper. For $\epsilon > 0$ and any $\Omega_0 \subset\subset \Omega$, let

$$X = \{\mu \in L^\infty(\Omega);\ \text{ess supp}(\mu) \subset \Omega_0,\ \|\mu\|_{L^\infty(\Omega)} \leq 1 - \epsilon\}.$$

Furthermore, define $Y$ to be the closure of $C^\infty(\overline{\Omega})$ with respect to

$$||u||_Y := \|u\|_{L^2(\Omega)} + \|\, u|_{\partial\Omega}\,\|_{L^\infty(\partial\Omega)}.$$

For $k \in \mathbb{C}$, let $U_k$ be the $\mathbb{R}$-linear map $U_k : X \to L^2(\Omega)$, given by $U_k(\mu) = u_\mu(\,\cdot\,, k)$, where $u_\mu(z, k)$ is the unique solution $u = u_\mu(\,\cdot\,, k) \in L^2(\Omega)$ of the equation (3.13). Define $W_k : X \to Y$ by

$$W_k\mu = \omega_\mu(\,\cdot\,, k) = -P(\overline{u_\mu(\,\cdot\,, k)}).$$

4.1. **Fréchet differentiability.** We will show that $W_k$ is a $C^\infty$-map $X \to Y$ and analyze its Fréchet derivatives at $\mu_0 = 0$. For each $k \in \mathbb{C}$, one can solve (3.14) by a Neumann series which converges for $\|\mu\|_{L^\infty}$ sufficiently small. We analyze the individual terms of the series by introducing polar coordinates in the $k$ plane, $k = \tau e^{i\varphi}$, and then taking the partial Fourier transform in $\tau$. The leading term in the Neumann series will be the basis for the edge detection imaging technique that is the main point of the paper, while the higher order terms are transformed into multilinear operators acting on $\mu$. The remainder of the paper will then be devoted to understanding the Fourier transformed terms, using the first derivative for effective edge detection in EIT and obtaining partial control over the higher derivatives.

**Theorem 4.1.** *The map $U_k : X \to L^2(\Omega)$, $U_k(\mu) := u_\mu(\,\cdot\,, k)$, is infinitely Fréchet-differentiable with respect to $\mu$, and its Fréchet derivatives are real-analytic functions of $k \in \mathbb{C}$. Moreover, for $p \geq 1$, its $p$-th order Fréchet derivative at $\mu = 0$ in direction $(\mu_1, \mu_2, \ldots, \mu_p) \in (L^2(\Omega_0))^p$ satisfies*

$$\left\| \left. \frac{D^p U_k}{D\mu^p} \right|_{\mu=0} (\mu_1, \mu_2, \ldots, \mu_p) \right\|_{L^2(\Omega)} \leq C_p (1 + |k|)^p \|\mu_1\|_{L^2(\Omega)} \cdot \|\mu_2\|_{L^2(\Omega)} \cdots \|\mu_p\|_{L^2(\Omega)} \tag{4.1}$$

*for some $C_p > 0$. In particular, the first Fréchet derivative has the form*

$$\left. \frac{DU_k}{D\mu} \right|_{\mu=0} (\mu_1) = -P\rho(ike_{-k}\mu_1). \tag{4.2}$$

*Moreover, for $k \in \mathbb{C}$ the map $W_k : X \to Y$,*

$$W_k(\mu) := \omega_\mu(\,\cdot\,, k) = -P\rho(u_\mu(\,\cdot\,, k)),$$

*is infinitely Fréchet-differentiable with respect to $\mu$ and its Fréchet derivatives are real-analytic functions of $k \in \mathbb{C}$.*

*Proof.* We can rewrite (3.13) for $u = u_\mu(\,\cdot\,, k) \in L^2(\Omega)$ as

$$(I - e_k \mu S \rho)u + ike_k \mu P \rho u = ike_k \mu. \tag{4.3}$$

On the left hand side, $e_k$ and $\mu$ denote pointwise multiplication operators with the functions $e_k(z)$ and $\mu(z)$, resp.; on the right, $e_k(z)\mu(z)$ is an element of $L^2(\Omega)$.

Since $\|\rho\|_{L^2(\Omega)\to L^2(\Omega)} = 1$, $\|S\|_{L^2(\Omega)\to L^2(\Omega)} = 1$, and $\|\mu\|_{L^\infty(\Omega)} < 1$, the inverse operator $(I - e_k \mu S \rho)^{-1} : L^2(\Omega) \to L^2(\Omega)$ exists and is a

$C^\omega$ function (i.e., a real analytic function) of $k$. Thus, (4.3) can be rewritten as

$$(I - B_{\mu,k})u = K_{\mu,k}(ike_k\mu), \tag{4.4}$$

where

$$K_{\mu,k}u = (I - e_k\mu S\rho)^{-1}u, \quad B_{\mu,k}u = K_{\mu,k}(ike_k\mu P\rho u). \tag{4.5}$$

Since $P : L^2(\Omega) \to L^2(\Omega)$ is a compact operator, (4.5) defines a compact operator $B_{\mu,k} : L^2(\Omega) \to L^2(\Omega)$. To find the kernel of $I - B_{\mu,k}$, consider $u^0 \in L^2(\Omega)$ satisfying $(I - B_{\mu,k})u^0 = 0$. Then,

$$(I - e_k\mu S\rho)u^0 + ike_k\mu P\rho u^0 = 0. \tag{4.6}$$

When we consider $P$, given in (3.11), as an operator $P : L^2(\Omega) \to L^2_{loc}(\mathbb{C})$, equation (4.6) yields that $f^0(z) = -e^{ikz}(P\overline{u^0})(z) \in L^2_{loc}(\mathbb{C})$ satisfies

$$\begin{aligned} &\overline{\partial}_z f^0(z) = \mu(z)\,\overline{\partial_z f^0(z)}, \quad z \in \mathbb{C}, \\ &e^{-ikz}f^0(z) = \mathcal{O}(\frac{1}{|z|}) \text{ as } |z| \to \infty. \end{aligned} \tag{4.7}$$

By [6], the solution $f^0$ of (4.7) has to be zero. Hence,

$$u^0(z) = -\overline{\partial(e^{-ikz}f^0(z))} = 0$$

and the operator $I - B_{\mu,k} : L^2(\Omega) \to L^2(\Omega)$ is one-to-one. Thus the Fredholm equation (4.4) is uniquely solvable and we can write its solutions as $u = u_\mu(\,\cdot\,, k)$,

$$u_\mu(\,\cdot\,, k) = (I - B_{\mu,k})^{-1}K_{\mu,k}(ike_k\mu). \tag{4.8}$$

By the Analytic Fredholm Theorem, the maps $k \mapsto K_{\mu,k}$ and $k \mapsto (I - B_{\mu,k})^{-1}$ are real-analytic, $\mathbb{C} \to \mathcal{L}(L^2(\Omega), L^2(\Omega))$, where $\mathcal{L}(L^2(\Omega), L^2(\Omega))$ is the space of the bounded linear operators $L^2(\Omega) \to L^2(\Omega)$.

Define $K^{(p)} = \frac{D^p}{D\mu^p}K_{\mu,k}|_{\mu=0}$ and $B^{(p)} = \frac{D^p}{D\mu^p}B_{\mu,k}|_{\mu=0}$. Since $K_{\mu,k}|_{\mu=0} = I$, we see that

$$K^{(p)}(\mu_1, \mu_2, \ldots, \mu_p) = \sum_\sigma (e_k\mu_{\sigma(1)}S\rho) \circ (e_k\mu_{\sigma(2)}S\rho) \circ \cdots \circ (e_k\mu_{\sigma(p)}S\rho),$$

where the sum is taken over permutations $\sigma : \{1, 2, \ldots, p\} \to \{1, 2, \ldots, p\}$. Furthermore, one has

$$\begin{aligned} B^{(p)}(\mu_1, \mu_2, \ldots, \mu_p) = {} & K^{(p-1)}(\mu_2, \mu_3, \mu_4, \ldots, \mu_p) \circ (ike_k\mu_1 P\rho) \\ & + K^{(p-1)}(\mu_1, \mu_3, \mu_4, \ldots, \mu_p) \circ (ike_k\mu_2 P\rho) \\ & + K^{(p-1)}(\mu_1, \mu_2, \mu_4, \ldots, \mu_p) \circ (ike_k\mu_3 P\rho) \\ & + \cdots + K^{(p-1)}(\mu_1, \mu_2, , \ldots, \mu_{p-1}) \circ (ike_k\mu_p P\rho). \end{aligned}$$

We can compute the higher order derivatives $\frac{D^p}{D\mu^p}(I-B_{\mu,k})^{-1}|_{\mu=0}$, in the direction $(\mu_1,\mu_2,\ldots,\mu_p)$, using the polarization identity for symmetric multilinear functions, if these derivatives are known in the case when $\mu_1=\mu_2=\cdots=\mu_p$. In the latter case the derivatives can be computed using Faa di Bruno's formula, which generalizes the chain rule to higher derivatives,

$$\frac{d^p}{dt^p}f(g(t)) = \sum \frac{p!}{m_1!\,m_2!\,\cdots\,m_p!}\cdot f^{(m_1+\cdots+m_n)}(g(t))\cdot\prod_{j=1}^{n}\left(\frac{g^{(j)}(t)}{j!}\right)^{m_j},$$

where the sum runs over indexes $(m_1,m_2,\ldots,m_p)\in\mathbb{N}^p$ satisfying $m_1+2m_2+\cdots+pm_p=p$. Indeed, this formula can be applied with $f(B)=(I-B)^{-1}$ and $g(t)=B_{t\mu_1,k}$. As $g(0)=0$ and the norm of the $p$-th derivative of $B_{t\mu_1,k}$ with respect to $t$ is bounded by $c_p(1+|k|)^p\|\mu_1\|^p$, we obtain estimate (4.1). Moreover, since $k\mapsto ike_k\mu$ is a real analytic map, $\mathbb{C}\to L^2(\Omega)$, we see that the Fréchet derivatives $k\mapsto\frac{D^pu_\mu}{D\mu^p}|_{\mu=0}(\,\cdot\,,k)\in L^2(\Omega)$ are real analytic maps of $k\in\mathbb{C}$.

Finally, recall that $\Omega_0\subset\Omega$ is a relatively compact set. For $\mu\in X$, we have $\mathrm{supp}(\mu)\subset\Omega_0$, and thus the function $u_\mu(\,\cdot\,,k)=U_k(\mu)$ is also supported in $\Omega_0$. As $P$ is given in (3.11) we see easily that for $(\mu_1,\mu_2,\ldots,\mu_p)\in(L^2(\Omega_1))^p$ the Fréchet derivatives

$$\left.\frac{D^pW_k}{D\mu^p}\right|_{\mu=0}(\mu_1,\mu_2,\ldots,\mu_p) = -P\rho\left.\frac{D^pU_k}{D\mu^p}\right|_{\mu=0}(\mu_1,\mu_2,\ldots,\mu_p)$$

are in $Y$, and that these derivatives are real analytic functions of $k\in\mathbb{C}$. □

4.2. **Neumann series.** Now consider a Neumann series expansion approach to solving (3.14), looking for a $u\sim\sum_{n=0}^{\infty}u_n$, with $u_0:=-\overline{\alpha}$ and $u_{n+1}:=-A\overline{u_n}$, $n\geq 0$, and the resulting

$$\omega=-P\overline{u}\sim\sum_{n=0}^{\infty}-P\overline{u_n}=:\sum_{n=0}^{\infty}\omega_n.$$

The first three terms of the expansion are given by

$$u_0=-\overline{\alpha},\quad \omega_0=P\alpha, \tag{4.9}$$

$$u_1=A\alpha=-(\overline{\alpha}P+\overline{\nu}S)(\alpha),\quad \omega_1=P(\alpha\overline{P\alpha}+\nu\overline{S\alpha}), \tag{4.10}$$

and

$$u_2 = -(\overline{\alpha}P+\overline{\nu}S)(\alpha\overline{P}\overline{\alpha}+\nu\overline{S}\overline{\alpha}),$$

$$\omega_2 = P(\alpha\overline{P}+\nu\overline{S})(\overline{\alpha}P\alpha+\overline{\nu}S\alpha). \tag{4.11}$$

Since we know that $U_k : X \to L^2(\Omega)$ is $C^\infty$, above

$$
\begin{aligned}
u_n(\,\cdot\,,k) &= \frac{D^n U_k}{D\mu^n}\bigg|_{\mu=0}(\mu,\mu,\dots,\mu), \\
\omega_n(\,\cdot\,,k) &= -P\rho\Big(u_n(\,\cdot\,,k)\Big).
\end{aligned} \tag{4.12}
$$

Due to the polynomial growth in the estimates (4.1), the functions $u_n(z,k)$ and $\omega_n(z,k)$ can be considered as tempered distributions in the $k$ variable. Hence we can introduce polar coordinates, $k = \tau e^{i\varphi}$, and then take the partial Fourier transform with respect to $\tau$ of the tempered distributions $\tau \mapsto u_n(z,k)|_{k=\tau e^{i\varphi}}$ and $\tau \mapsto \omega_n(z,k)|_{k=\tau e^{i\varphi}}$.

Later we prove the following theorem for the Fourier transform of the Fréchet derivatives:

**Theorem 4.2.** *Let $\mu \in X$ and consider the partial Fourier transforms of the Fréchet derivatives,*

$$
\begin{aligned}
&\widehat{\omega}_n^{z_0}(t,e^{i\varphi}) = \mathcal{F}_{\tau\to t}\bigg(\omega_n(z_0,k)\Big|_{k=\tau e^{i\varphi}}\bigg), \quad n=0,1,2,\dots, \\
&\omega_n(\,\cdot\,,k) = -P\rho\big(\frac{D^{n+1}U_k}{D\mu^{n+1}}\Big|_{\mu=0}(\mu,\mu,\dots,\mu)\big),
\end{aligned} \tag{4.13}
$$

*that we denote at $z_0 \in \partial\Omega$ by*

$$
\widehat{\omega}_n(z_0,t,e^{i\varphi}) = \widehat{\omega}_n^{z_0}(t,e^{i\varphi}).
$$

*Then we have*

$$
\widehat{\omega}_n^{z_0}(t,e^{i\varphi}) = T_n^{z_0}(\mu\otimes\cdots\otimes\mu),
$$

*where $T_n^{z_0}$ are multi-linear operators given by*

$$
\begin{aligned}
&T_n^{z_0}(\mu\otimes\cdots\otimes\mu) := \\
&\int_{\mathbb{C}^{n+1}} K_n^{z_0}(t,e^{i\varphi};z_1,\dots,z_{n+1})\,\mu(z_1)\cdots\mu(z_{n+1})\,d^2z_1\cdots d^2z_{n+1},
\end{aligned}
$$

*where the Schwartz kernel $K_n^{z_0}$ contained in the union of pairwise cleanly intersecting Lagrangian manifolds $\Lambda_J$, indexed by $\mathcal{J} = \{J;\ J\subset\{1,\dots,n\}\}$. For each $J\in\mathcal{J}$, $\Lambda_J = N^*L_n^J$ is the conormal bundle of a smooth submanifold, $L_n^J \subset \mathbb{R}\times S^1\times\mathbb{C}^{n+1}$,*

$$
L_n^J := \Big\{t + (-1)^n\,2Re\left(e^{i\varphi}\sum_{j=1}^{n+1}(-1)^j z_j\right) = 0\Big\} \cap \bigcap_{j\in J}\{z_j - z_{j+1} = 0\}. \tag{4.14}
$$

Roughly speaking, Theorem 4.2 implies that the operator $T_n^{z_0}$ transforms singularities of $\mu$ to singularities of $\widehat{\omega}_n^{z_0}$ so that the singularities of $\mu$ propagate along the $L_n^J$. Further discussion, as well as the proof of the theorem, will be found later in the paper.

The zeroth-order term $\omega_0$ will serve as the basis for stable edge and singularity detection, while the higher order terms need to be characterized in terms their regularity and the location of their wave front sets. After the partial Fourier transform $\omega \to \widehat{\omega}$ described in the next section, the map $T_0 : \mu \to \widehat{\omega}_0$ turns out to be essentially a derivative of the Radon transform. Thus, the leading term of $\widehat{\omega}$ is a *nonlinear Radon transform* of the conductivity $\sigma$, allowing for good reconstruction of the singularities of $\sigma$ from the singularities of $\widehat{\omega}_0$. The higher order terms $\widehat{\omega}_n$ record scattering effects and explain artifacts observed in simulations; these should be filtered out or otherwise taken into account for efficient numerics and accurate reconstruction. We characterize this scattering in detail for $\widehat{\omega}_1$, $\widehat{\omega}_2$ and describe the wavefront set for the higher order $\tilde{\omega}_n$, $n \geq 3$.

## 5. Fourier transform and the virtual variable

We continue the analysis with two elementary transformations of the problem:

(i) First, one introduces polar coordinates in the complex frequency, $k$, writing $k = \tau e^{i\varphi}$, with $\tau \in \mathbb{R}$ and $e^{i\varphi} \in \mathbb{S}^1$.

(ii) Secondly, one takes a partial Fourier transform in $\tau$, introducing a nonphysical artificial (i.e., *virtual*) variable, $t$. We show that the introduction of this variable reveals the complex principal type structure of the problem, as discussed in §2. This allows for good propagation of singularities from the interior of $\Omega$ to the boundary, allowing singularities of the conductivity in the interior to be robustly detected by voltage-current measurements at the boundary.

By (3.8), $\omega_0 = ikP(e_k\mu)$ (see also (4.2)), so that

$$\omega_0(z,k) = \frac{ik}{\pi}\int_{\mathbb{C}} \frac{e_k(z_1)\mu(z_1)}{z-z_1}\, d^2z_1. \tag{5.1}$$

Write the complex frequency as $k = \tau e^{i\varphi}$ with $\tau \in \mathbb{R}$, $\varphi \in [0, 2\pi)$ (which we usually identify with $e^{i\varphi} \in \mathbb{S}^1$). Taking the partial Fourier

transform in $\tau$ then yields

$$\begin{aligned}(5.2)\quad \widehat{\omega}_0(z,t,e^{i\varphi}) &:= \int_{\mathbb{R}} e^{-it\tau}\omega_0(z,\tau e^{i\varphi})\,d\tau \\ &= \frac{e^{i\varphi}}{\pi}\int_{\mathbb{R}}\int_{\mathbb{C}} \frac{e^{-i\tau t}}{z-z_1}\,(i\tau)\,e_{\tau e^{i\varphi}}(z_1)\mu(z_1)\,d^2z_1\,d\tau \\ &= \frac{e^{i\varphi}}{\pi}\int_{\mathbb{R}}\int_{\mathbb{C}} (i\tau)\,\frac{e^{-i\tau(t-2\mathrm{Re}(e^{i\varphi}z_1))}}{z-z_1}\,\mu(z_1)\,d^2z_1\,d\tau \\ &= -2e^{i\varphi}\int_{\mathbb{C}} \frac{\delta'(t-2\mathrm{Re}(e^{i\varphi}z_1))}{z-z_1}\,\mu(z_1)\,d^2z_1,\end{aligned}$$

with the integrals interpreted in the sense of distributions. Note that since $t$ is dual to $\tau$, which is the (signed) length of a frequency variable, for heuristic purposes $t$ may be thought of as temporal.

5.1. **Microlocal analysis of $\widehat{\omega}_0$.** Fix $\Omega_0 \subset\subset \Omega_2 \subset\subset \Omega$ and assume once and for all that $supp(\mu) \subset \Omega_0$, i.e., $\sigma \equiv 1$ on $\Omega_0^c$. Let $\Omega_1 := (\overline{\Omega_2})^c \supset \Omega^c \supset \partial\Omega$. Then the map $T_0 : \mathcal{E}'(\Omega_0) \to \mathcal{D}'(\Omega_1 \times \mathbb{R} \times \mathbb{S}^1)$, defined by

$$\mu(z_1) \longrightarrow (T_0\mu)(z,t,e^{i\varphi}) := \widehat{\omega}_0(z,t,e^{i\varphi}),$$

has Schwartz kernel

$$(5.3)\qquad K_0(z,t,e^{i\varphi},z_1) = -2e^{i\varphi}\frac{\delta'(t-2\mathrm{Re}(e^{i\varphi}z_1))}{z-z_1}.$$

Note that $|z-z_1| \geq c > 0$ for $z \in \Omega_1$ and $z_1 \in \Omega_0$. For $z \in \partial\Omega$ and $z_1 \in \Omega_0$, the factor $(z-z_1)^{-1}$ in (5.3) is smooth, and $T_0$ acts on $\mu \in \mathcal{E}'(\Omega_0)$ as a standard Fourier integral operator (FIO) (See [37] for the standard facts concerning FIOs which we use.) However, as we will see below, the amplitude $1/(z-z_1)$, although $C^\infty$, both

(i) accounts for the fall-off rate in detectability of jumps, namely as the inverse of the distance from the boundary; and

(ii) causes artifacts, especially when some singularities of $\mu$ are close to the boundary, due to its large magnitude and the large gradient of its phase.

To see this, start by noting that the kernel $K_0$ is singular at the hypersurface,

$$L := \{t - 2\mathrm{Re}(e^{i\varphi}z_1) = 0\} \subset \mathbb{C}_z \times \mathbb{R}_t \times \mathbb{S}^1_{e^{i\varphi}} \times \mathbb{C}_{z_1},$$

Write $z = x + iy$, $z_1 = x' + iy'$, and use $\zeta$, $\zeta'$ to denote their dual variables, $(\xi,\eta)$, $(\xi',\eta')$. Using the defining function $t - 2\mathrm{Re}(e^{i\varphi}z_1) = t - 2(\cos(\varphi)x' - \sin(\varphi)y')$, identifying $\mathbb{C}$ with $\mathbb{R}^2$ as above and $\mathbb{S}^1$ with $[0,2\pi)$, we see that the conormal bundle of $L$ is

$$\begin{aligned}\Lambda := N^*L \;\; = \;\; & \Big\{\Big(z, 2\mathrm{Re}(e^{i\varphi}z_1), e^{i\varphi}, x', y';\, 0, 0, \tau, \\ & \qquad 2\tau\,\mathrm{Im}\,(e^{i\varphi}z_1), -2\tau e^{-i\varphi}\Big) : \\ & \qquad z \in \Omega_1,\, z_1 \in \Omega_0,\, e^{i\varphi} \in \mathbb{S}^1,\, \tau \in \mathbb{R}\setminus 0\Big\},\end{aligned} \tag{5.4}$$

which is a Lagrangian submanifold of $T^*(\Omega_1 \times \mathbb{R} \times \mathbb{S}^1 \times \Omega_0) \setminus 0$. The kernel $K_0$ has the oscillatory representation

$$K_0(z, t, e^{i\varphi}, z_1) = \int_{\mathbb{R}} e^{i\tau\left(t - 2\,\mathrm{re}\left(e^{i\varphi}z_1\right)\right)} \frac{e^{i\varphi}(i\tau)}{\pi(z - z_1)}\, d\tau, \tag{5.5}$$

interpreted in the sense of distributions. The amplitude in (5.5) belongs to the standard space of symbols $S^1_{1,0}$ on $(\Omega_1 \times \mathbb{R} \times \mathbb{S}^1 \times \Omega_0) \times (\mathbb{R} \setminus 0)$ [37]. Thus, using Hörmander's notation and orders for Fourier integral (Lagrangian) distribution classes [37], $K_0$ is of order $1 + \frac{1}{2} - \frac{0}{4}$, i.e., $K_0 \in I^0(\Lambda)$. We conclude that $T_0$ is an FIO of order 0 associated with the canonical relation

$$C \subset \Big(T^*(\Omega_1 \times \mathbb{R} \times \mathbb{S}^1) \setminus 0\Big) \times \Big(T^*\Omega_0 \setminus 0\Big), \tag{5.6}$$

written $T_0 \in I^0(C)$, where

$$\begin{aligned}C = \Lambda' \;\; := \;\; & \Big\{(z, t, e^{i\varphi}, \zeta, \tau, \Phi; z_1, \zeta_1) : \\ & \qquad (z, t, e^{i\varphi}, z_1; \zeta, \tau, \Phi, -\zeta_1) \in \Lambda\Big\}.\end{aligned} \tag{5.7}$$

The wavefront set of $K_0$ satisfies $WF(K_0) \subset \Lambda$ (and actually, by the particular form of $K_0$, equality holds). Hence, by the Hörmander-Sato lemma [37], $WF\big(T_0\mu\big) \subset C_0 \circ WF(\mu)$, with $C$ considered as a set-theoretic relation from $T^*\Omega_0 \setminus 0$ to $T^*(\Omega_1 \times \mathbb{R} \times \mathbb{S}^1) \setminus 0$.

We next consider the geometry of $C$, parametrized as

$$\begin{aligned}C \;\; = \;\; & \Big\{\big(z, 2\mathrm{Re}(e^{i\varphi}z_1), e^{i\varphi}, 0, 0, \tau, 2\tau\,\mathrm{Im}\,(e^{i\varphi}z_1); z_1, 2\tau e^{-i\varphi}\big) : \\ & \qquad z \in \Omega_1,\, z_1 \in \Omega_0,\, e^{i\varphi} \in \mathbb{S}^1,\, \tau \in \mathbb{R}\setminus 0\Big\}.\end{aligned}$$

$C$ is of dimension 6, while the natural projections to the left and right, $\pi_L : C \to T^*(\Omega_1 \times \mathbb{R} \times \mathbb{S}^1) \setminus 0$ and $\pi_R : C \to T^*\Omega_0 \setminus 0$, are into spaces of dimensions 8 and 4, resp. $C$ satisfies the Bolker condition [26, 27]: $\pi_L$ is an immersion (which is equivalent with $\pi_R$ being a submersion) and is globally injective.

However, $C$ satisfies a condition much stronger than the Bolker condition: the geometry of $C$ is *independent* of $z \in \Omega_1$. If for any $z_0 \in \Omega_1$

we set $K_0^{z_0} = K_0|_{z=z_0}$, then one can factor $C = 0_{T^*\Omega_1} \times C_0$ (with the obvious reordering of the variables), where $0_{T^*\Omega_1}$ is the zero-section of $T^*\Omega_1$ and

$$\begin{aligned} C_0 &:= WF(K_0^{z_0})' \\ &= \Big\{ \big(2\mathrm{Re}(e^{i\varphi} z_1), e^{i\varphi}, \tau, 2\tau\, \mathrm{Im}\,(e^{i\varphi} z_1); z_1, 2\tau e^{-i\varphi}\big) \\ &\qquad\qquad : z_1 \in \Omega_0,\, e^{i\varphi} \in \mathbb{S}^1,\, \tau \in \mathbb{R} \setminus 0 \Big\} \\ &\subset \big(T^*(\mathbb{R} \times \mathbb{S}^1) \setminus 0\big) \times \big(T^*\Omega_0 \setminus 0\big). \end{aligned} \tag{5.8}$$

(Note that $C_0 = N^* L_0'$, where

$$L_0 = \{(t, e^{i\varphi}, z_1) \in \mathbb{R} \times \mathbb{S}^1 \times \mathbb{C} : t - 2\mathrm{Re}(e^{i\varphi} z_1) = 0\}.)$$

Hence, it is reasonable to form determined (i.e., 2D) data sets from two-dimensional slices of the full $T_0$ by fixing $z = z_0$; for these to correspond to boundary measurements, assume that $z_0 \in \partial\Omega \subset \Omega_1$. Thus, define $T_0^{z_0} : \mathcal{E}'(\Omega_0) \to \mathcal{D}'(\mathbb{R} \times \mathbb{S}^1)$ by $\mu(z_1) \longrightarrow (T_0^{z_0}\mu)(t, \varphi) := \widehat{\omega}_0(z_0, t, \varphi)$. $T_0^{z_0}$ has Schwartz kernel $K_0^{z_0}$ given by (5.5), but with $z$ fixed at $z = z_0$, and thus $T_0^{z_0}$ is an FIO of order $1 + \frac{1}{2} - \frac{4}{4} = \frac{1}{2}$ with canonical relation $C_0$, i.e., $T_0^{z_0} \in I^{\frac{1}{2}}(C_0)$. Further, one easily checks from (5.8) that $\pi_R : C_0 \to T^*\Omega_0 \setminus 0$ and $\pi_L : C_0 \to T^*(\mathbb{R} \times \mathbb{S}^1) \setminus 0$ are local diffeomorphisms, injective if we either restrict $\tau > 0$ or $\phi \in [0, \pi)$, in which case $C_0$ becomes a global canonical graph.

Composing $T_0^{z_0}$ with the backprojection operator $(T_0^{z_0})^*$ then yields, by the transverse intersection calculus for FIOs [37], a normal operator $(T_0^{z_0})^* T_0^{z_0}$ which is a $\Psi$DO of order 1 on $\Omega_0$, i.e., $(T_0^{z_0})^* T_0^{z_0} \in \Psi^1(\Omega_0)$. We will show that the normal operator is elliptic and thus admits a left parametrix, $Q(z, D) \in \Psi^{-1}(\mathbb{C})$, so that

$$Q(T_0^{z_0})^* T_0^{z_0} - I \text{ is a smoothing operator on } \mathcal{E}'(\Omega_0). \tag{5.9}$$

Therefore, $T_0^{z_0}\mu$ determines $\mu$ mod $C^\infty$, making it possible to determine the singularities of the Beltrami multiplier $\mu$, and hence those of the conductivity $\sigma$, from the singularities of $T_0^{z_0}\mu$. All of this follows from standard arguments once one shows that $T_0^{z_0}$ is an elliptic FIO.

To establish this ellipticity, we may, because $z_0 - z_1 \neq 0$ for $z_1 \in \Omega_0$, calculate the principal symbol $\sigma_{prin}(T_0^{z_0})$ using (5.3). At a point of $C_0$, as given by the parametrization (5.8), we may calculate the induced symplectic form $\varkappa_{C_0}$ on $C_0$,

$$\begin{aligned} \varkappa_{C_0} &:= \pi_R^*(\varkappa_{T^*\Omega_0}) \\ &= -2\tau\, d\varphi \wedge (s(\varphi)dx' + c(\varphi)dy') \\ &\quad +2d\tau \wedge (c(\varphi)dx' - s(\varphi)dy'), \end{aligned} \tag{5.10}$$

so that $\varkappa_{C_0} \wedge \varkappa_{C_0} = 4\tau d\varphi \wedge d\tau \wedge dx' \wedge dy'$, and the half density

$$|\varkappa_{C_0} \wedge \varkappa_C|^{\frac{1}{2}} = 2|\tau|^{\frac{1}{2}} |d\varphi \wedge d\tau \wedge dx' \wedge dy|^{\frac{1}{2}}.$$

From this it follows that

$$\sigma_{prin}(T_0^{z_0}) = \frac{-2e^{i\varphi}(i\tau)}{2|\tau|^{\frac{1}{2}}(z_0 - z_1)} = \frac{(-ie^{i\varphi})\, sgn(\tau)|\tau|^{\frac{1}{2}}}{z_0 - z_1},$$

which is elliptic of order $1/2$ on $C_0$.

**Example.** Although (5.9) allows imaging of general $\mu \in \mathcal{E}'(\Omega_0)$ from $\omega_0(z_0, \cdot, \cdot)$, consider the particular case where $\mu$ is a piecewise smooth function with jumps across an embedded smooth curve $\gamma = \{z : g(z) = 0\} \subset \Omega_0$ (not necessarily closed or connected), with unit normal $n$. In fact, consider the somewhat more general case of a $\mu$ which is *conormal of order* $m \in \mathbb{R}$, $m \leq -1$, with respect to $\gamma$, i.e., is of the form

$$\mu(z) = \int_{\mathbb{R}} e^{ig(z)\theta}\, a_m(x, \theta)\, d\theta, \tag{5.11}$$

where $a_m$ belongs to the standard symbol class $S^m_{1,0}(\Omega_0 \times (\mathbb{R} \setminus 0))$. (In general, we will denote the orders or bi-orders of symbols by subscripts.) A $\mu$ which is a piecewise smooth function with jumps across $\gamma$ is of this form for $m = -1$; for $-2 < m < -1$, a $\mu$ given by (5.11) is piecewise smooth, as well as Hölder continuous of order $-m-1$ across $\gamma$. (Recall that uniqueness in the Calderón problem for $C^\omega$ piecewise smooth conductivities was treated in [55] and some cases of conormal conductivities in [22, 48].) As a Fourier integral distribution, $\mu \in I^m(\Gamma)$ for the Lagrangian manifold,

$$\Gamma := N^*\gamma = \big\{ (z_1, \theta\, n(z_1)) : z_1 \in \gamma,\, \theta \in \mathbb{R} \setminus 0 \big\} \subset T^*\Omega_0 \setminus 0. \tag{5.12}$$

By the transverse intersection calculus, $T_0^{z_0}\mu \in I^{m+\frac{1}{2}}(\widetilde{\Gamma})$, where

$$\begin{aligned} \widetilde{\Gamma} \;:=\; C \circ \Gamma = \Big\{ \big(2\mathrm{Re}(e^{i\varphi}z_1), e^{i\varphi}, \tau, 2\tau\, \mathrm{Im}\,(e^{i\varphi}z_1)\big) : \\ z_1 \in \gamma,\, e^{i\varphi} = \overline{n(z_1)},\, \tau \in \mathbb{R} \setminus 0 \Big\} \subset T^*(\mathbb{R} \times \mathbb{S}^1) \setminus 0. \end{aligned}$$

Thus, for $\varphi$ fixed, $T_0^{z_0}\mu$ has singularities at those values of $t$ of the form $t = 2\mathrm{Re}(e^{i\varphi}z_1)$ with $z_1$ ranging over the points of $\gamma$ with $n(z_1) = e^{-i\varphi}$. (Under a finite order of tangency condition on $\gamma$, for each $\varphi$ there are only a finite number of such points.) These values of $t$ depend on $\varphi$ but

*are independent of* $z_0 \in \partial\Omega$; this reflects the complex principal type geometry underlying the problem, which has propagated the singularities of $\mu$ out to *all* of the boundary points of $\Omega$. Denoting these values of $t$ by $t_j(e^{i\varphi})$, the distribution $T_0^{z_0}\mu$ has Lagrangian singularities conormal of order $m+\frac{1}{2}$ on $\mathbb{R}$ at $\{t_j\}$, and thus is of magnitude $\sim |t-t_j|^{-m-\frac{3}{2}}$ for $-\frac{3}{2} < m \leq -1$. In particular, if $\mu$ is piecewise smooth with jumps, for which $m=-1$, the singularities have magnitude $\sim |t-t_j|^{-\frac{1}{2}}$.

**Remark.** More generally, since $T_0^{z_0}$ is an elliptic FIO of order $1/2$ associated to a canonical graph, if we denote the $L^2$-based Sobolev space of order $s \in \mathbb{R}$ by $H^s$, it follows that if $\mu \in H^s \setminus H^{s-1}$, then $T_0^{z_0}\mu \in H^{s-\frac{1}{2}} \setminus H^{s-\frac{3}{2}}$, allowing us to image general singularities of $\mu$ and hence $\sigma$.

5.2. **'Averages' of $\widehat{\omega}_0$ and artifact removal.** As described above, each $T_0^{z_0} \in I^{\frac{1}{2}}(C_0)$; the symbol depends on $z_0$, the canonical relation (5.8) does not, and we now take advantage of this. For any $\mathbb{C}$-valued weight $a(\,\cdot\,)$ on $\partial\Omega$, define

$$\widehat{\omega}_0^a(t, e^{i\varphi}) := \int_{\partial\Omega} \widehat{\omega}_0(z_0, t, e^{i\varphi})\, a(z_0)\, dz_0, \tag{5.13}$$

and denote by $T_0^a$ the operator taking $\mu(z_1) \to \widehat{\omega}_0^a(t, e^{i\varphi})$. (It will be clear from context when the superscript is a point $z_0 \in \partial\Omega$ and when it is a function $a(\cdot)$ on the boundary.) We emphasize that (5.13) is a complex line integral. Then $T_0^a$ has kernel

$$\begin{aligned} K_0^a(t, e^{i\varphi}, z_1) &:= -2e^{i\varphi}\Big[\int_{\partial\Omega} \frac{a(z_0)\, dz_0}{z_0 - z_1}\Big]\delta'\big(t - 2\mathrm{Re}(e^{i\varphi} z_1)\big) \\ &= -4\pi i e^{i\varphi}\alpha(z_1)\delta'(t - 2\mathrm{Re}(e^{i\varphi} z_1)), \end{aligned} \tag{5.14}$$

where

$$\alpha(z_1) = \frac{1}{2\pi i}\int_{\partial\Omega} \frac{a(z_0)\, dz_0}{z_0 - z_1}, \quad z_1 \in \Omega,$$

is the Cauchy (line) integral of $a$. We thus have

$$\sigma_{prin}(T_0^a) = 2\pi e^{i\varphi}\alpha(z_1) sgn(\tau)|\tau|^{\frac{1}{2}} \text{ on } C_0,$$

and therefore $(T_0^a)^* T_0^a \in \Psi^1(\Omega_0)$, with

$$\sigma_{prin}\big((T_0^a)^* T_0^a\big)(z, \zeta) = 2\pi^2 |\alpha(z)|^2 |\zeta|,$$

since, by 5.8, $|\tau| = \frac{1}{2}|\zeta'|$ on $C_0$. Thus,

$$(T_0^a)^* T_0^a = 2\pi^2 |\alpha|^2 \cdot |D_z| \bmod \Psi^0(\Omega_0).$$

By choosing $a \equiv (\pi\sqrt{2})^{-1}$ in (5.13), one has $\alpha \equiv (\pi\sqrt{2})^{-1}$ on $\Omega$ and $\sigma_{prin}((T_0^a)^* T_0^a)(z,\zeta) = |\zeta|$, yielding

$$(T_0^a)^* T_0^a = |D_z| \text{ mod } \Psi^0, \tag{5.15}$$

which faithfully reproduces the locations of the singularities of $\mu$ and accentuates their strength by one derivative. This is, in the context of our reconstruction method, an analogue of local (or $\Lambda$)-tomography [19] .

Alternatively (now with the choice of $a = 1/\pi$ ), one may obtain an exact *weighted, filtered backprojection* inversion formula,

$$(T_0^a)^*(|D_t|^{-1}) T_0^a = I \text{ on } L^2(\Omega_0). \tag{5.16}$$

On the level of the principal symbol, this follows from the microlocal analysis above, again since $|\tau| = \frac{1}{2}|\zeta'|$ on $C_0$; for the exact result, note that

$$T_0^a = -\big(\frac{i\pi}{\sqrt{2}}\big) e^{i\varphi} \big(\frac{\partial}{\partial s} R\mu\big)\big(\frac{1}{2}t, e^{i\varphi}\big), \tag{5.17}$$

where $R$ is the standard Radon transform,

$$(Rf)(s,\omega) = \int_{\mathbf{x}\cdot\omega = s} f(\mathbf{x})\, d^1\mathbf{x},\ (s,\omega) \in \mathbb{R} \times \mathbb{S}^1.$$

**Remark.** Note that if we take $\Omega = \mathbb{D}$, so that $\partial\Omega$ can be parametrized by $z_0 = e^{i\theta}$, then (5.13) becomes

$$\widehat{\omega}_0^a(t, e^{i\varphi}) = \int_0^{2\pi} \widehat{\omega}_0(e^{i\theta}, t, e^{i\varphi})\, ie^{i\theta}\, d\theta.$$

Thus, the weight is (slowly) oscillatory when expressed in terms of $d\theta$, but through destructive interference suppresses the artifacts present in each individual $\widehat{\omega}_0^{z_0}$. Fig. 5 illustrates, with a skull/hemorrhage phantom how using this simple weight removes the artifacts caused by the rapid change in the amplitude and phase of the Cauchy factor $(z_0 - z_1)^{-1}$, shown in Fig. 4.

## 6. Analysis of $\widehat{\omega}_1$

Just as the introduction of polar coordinates and partial Fourier transform, applied to zeroth order term in the Neumann expansion (i.e., the Fréchet derivative of the scattering map at $\mu = 0$), give rise to a term linear in $\mu$, their application to the first order term (4.11) gives rise to a term which is bilinear in $\mu$. Wavefront set analysis shows that this nonlinearity gives rise to two distinct types of singularities; we will

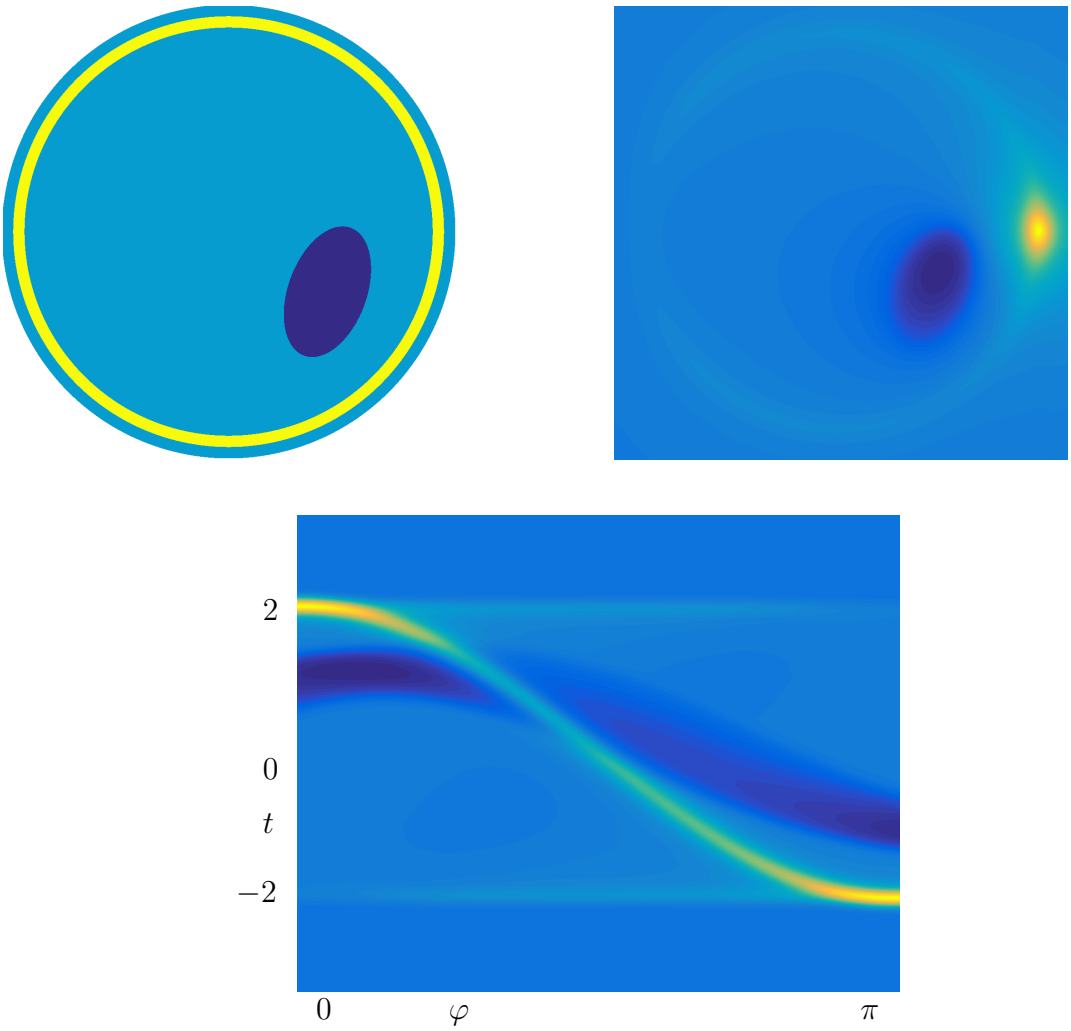


FIGURE 4. **Artifacts from a single $T_0^{z_0}$.** Top left: Phantom modeling hemorrhage (high conductivity inclusion) within skull (low conductivity shell). Bottom: $T_0^{z_0}\mu$ for $z_0 = 1$. Top right: backprojection applied to $T_0^{z_0}\mu$.

see in §10 that both of these are visible in the numerics, and need to be taken into account to give good reconstruction based on $\widehat{\omega}_0^a$.

We can rewrite (4.11) as

$$\omega_1(z,k) = P\big(\alpha(\overline{P}\overline{\alpha})\big) + P\big(\nu(\overline{S}\overline{\alpha})\big).$$

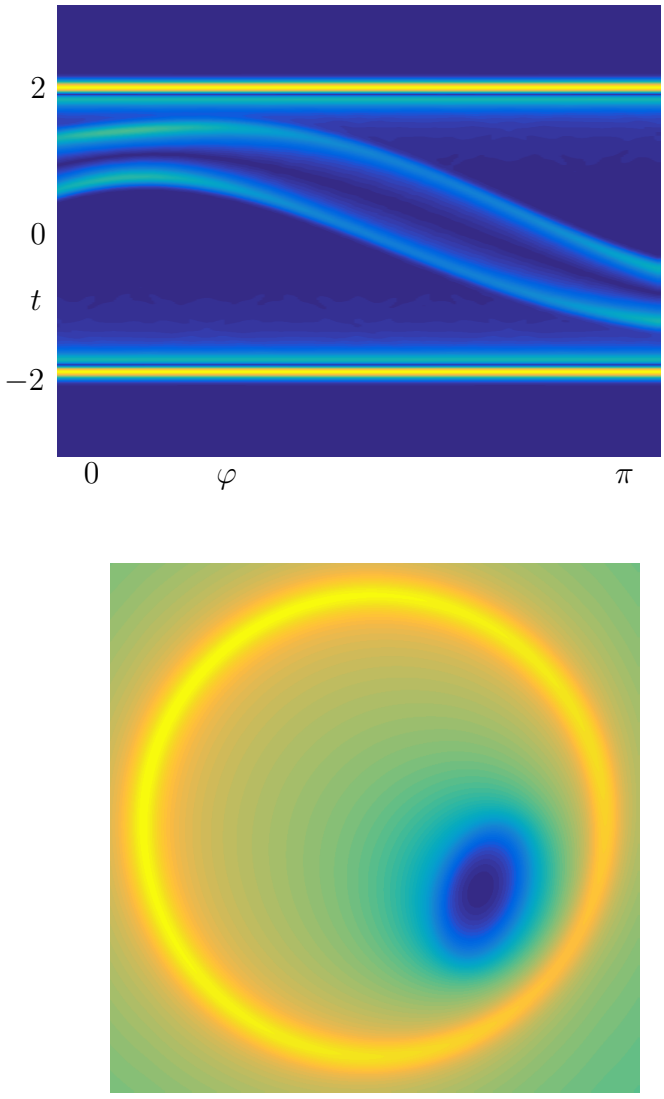


FIGURE 5. **Artifact removal using weighted $T_0^a$.** Top: $T_0^a\mu$ for phantom in Fig. 4. Bottom: reconstruction from $T_0^a\mu$ using formula (5.16).

where the linear operators $\overline{P}$, $\overline{S}$ are defined by $\overline{P}(f) = \overline{P(\overline{f})}$ and $\overline{S}(f) = \overline{S(\overline{f})}$. The kernels of $\overline{P}$, $\overline{S}$ are just the complex conjugates of the kernels of $P$, $S$ in (3.11), (3.12), resp. We now denote the two interior variables in $\Omega_0$ by $z_1$ and $z_2$; using (3.9), one sees that

$$\begin{aligned}\omega_1(z,k) &= \frac{-k^2}{\pi^2}\int_{\mathbb{C}}\int_{\mathbb{C}}\frac{e^{-2i\mathrm{Re}(kz_1)}\mu(z_1)}{z_1-z}\frac{e^{2i\mathrm{Re}(kz_2)}\mu(z_2)}{\overline{z_2}-\overline{z_1}}\,d^2z_1\,d^2z_2\\ &\quad+\frac{ik}{\pi^2}\int_{\mathbb{C}}\int_{\mathbb{C}}\frac{e^{-2i\mathrm{Re}(kz_1)}\mu(z_1)}{z_1-z}\frac{e^{2i\mathrm{Re}(kz_2)}\mu(z_2)}{(\overline{z_2}-\overline{z_1})^2}\,d^2z_1\,d^2z_2.\end{aligned}\tag{6.1}$$

Thus, for $z_0\in\partial\Omega$,

$$\begin{aligned}\widehat{\omega}_1(z_0,t,e^{i\varphi}) &= \int_{\mathbb{R}} e^{-it\tau}\omega_1(z_0,\tau e^{i\varphi})\,d\tau\\ &= \int_{\mathbb{C}}\int_{\mathbb{C}} K_1(z_0,t,e^{i\varphi};z_1,z_2)\,\mu(z_1)\,\mu(z_2)\,d^2z_1\,d^2z_2\end{aligned}\tag{6.2}$$

is given by a bilinear operator acting on $\mu\otimes\mu$, with kernel

$$\begin{aligned}K_1^{z_0}(t,e^{i\varphi};z_1,z_2) &= \frac{1}{\pi^2}\Big(\frac{e^{2i\varphi}\delta''(t+2\mathrm{Re}(e^{i\varphi}(z_1-z_2)))}{(z_1-z_0)(\overline{z_2}-\overline{z_1})}\\ &\quad+\frac{e^{i\varphi}\delta'(t+2\mathrm{Re}(e^{i\varphi}(z_1-z_2)))}{(z_1-z_0)(\overline{z_2}-\overline{z_1})^2}\Big).\end{aligned}\tag{6.3}$$

$K_1^{z_0}$ has multiple singularities, but, as in the case of $K_0$, the fact that $|z_1-z_0|\geq c>0$ for $z_0\in\partial\Omega$ and $z_1\in \mathit{supp}(\mu)\subset\Omega_0$ eliminates the singularities at $\{z_1-z_0=0\}$. The remaining singularities put $K_1^{z_0}$ in the general class of paired Lagrangian distributions introduced in [60, 25]. In fact, $K_1^{z_0}$ lies in a more restrictive class of *nested conormal distributions* (see [23]), associated with the pair (independent of $z_0$),

$$\begin{aligned}L_1 &:= \{t+2\mathrm{Re}(e^{i\varphi}(z_1-z_2))=0\}\\ &\supset L_3 := \{t+2\mathrm{Re}(e^{i\varphi}(z_1-z_2))=0,\ z_1-z_2=0\}\\ &\quad = \{t=0,\ z_2=z_1\}.\end{aligned}\tag{6.4}$$

(The subscripts are chosen to indicate the respective codimensions in $\mathbb{R}_t\times\mathbb{S}^1_\varphi\times\Omega_{0,z_1}\times\Omega_{0,z_2}$.) These have conormal bundles,

$$\Lambda_1 := N^*L_1,\ \Lambda_3 := N^*L_3\subset T^*(\mathbb{R}_t\times\mathbb{S}^1_\varphi\times\Omega_{0,z_1}\times\Omega_{0,z_2})\setminus 0,$$

and $WF(K_1^{z_0})\subseteq\Lambda_1\cup\Lambda_3$. (As with $K_0^{z_0}$, from the exact expression for the kernel one can show that equality holds.)

6.1. **Bilinear wavefront set analysis.** Define $\widehat{\omega}_1^{z_0}=\widehat{\omega}_1|_{z=z_0}$. Since $\widehat{\omega}_1^{z_0}(t,e^{i\varphi})=\langle K_1^{z_0}(t,e^{i\varphi},\cdot,\cdot),\mu\otimes\mu\rangle$, we have

$$WF(\widehat{\omega}_1^{z_0})\subset WF(K_1^{z_0})'\circ WF(\mu\otimes\mu)\subset(\Lambda_1'\cup\Lambda_3')\circ WF(\mu\otimes\mu).$$

Parametrizing $\Lambda_1$, $\Lambda_3$ in the usual way as conormal bundles, multiplying the variables dual to $z_1,z_2$ by $-1$ and then separating the variables

on the left and right, we obtain canonical relations in $T^*(\mathbb{R}\times\mathbb{S}^1)\times T^*(\Omega_0\times\Omega_0)$,

$$\begin{aligned} C_1 \;:=\; \Lambda_1' = \Big\{\Big( &-2\mathrm{Re}(e^{i\varphi}(z_1-z_2)), e^{i\varphi}, \tau, -2\tau\,\mathrm{Im}\,(e^{i\varphi}(z_1-z_2)); \\ &z_1, z_2, -2\tau e^{i\varphi}, 2\tau e^{i\varphi}\Big) : \\ &e^{i\varphi}\in\mathbb{S}^1,\ z_1,z_2\in\Omega_0,\ \tau\in\mathbb{R}\setminus 0\Big\},\ \text{and} \end{aligned} \tag{6.5}$$

$$\begin{aligned} C_3 \;:=\; \Lambda_3' = \Big\{\Big(0, e^{i\varphi}, \tau, 0; z_1, z_1, \zeta, -\zeta\Big) : \\ e^{i\varphi}\in\mathbb{S}^1,\ z_1\in\Omega_0,\ (\tau,\zeta)\in\mathbb{R}^3\setminus 0\Big\}. \end{aligned} \tag{6.6}$$

Representing $\mu\otimes\mu = \mu(z_1)\mu(z_2)$ as $(\mu\otimes 1)\cdot(1\otimes\mu)$; from a basic result concerning wavefront sets of products [37], one sees that

$$\begin{aligned} WF(\mu\otimes\mu) \;&\subseteq\; WF(\mu\otimes 1)\cup WF(1\otimes\mu)\cup\big(WF(\mu\otimes 1)+WF(1\otimes\mu)\big) \\ &\subseteq\; \big(WF(\mu)\times O_{T^*\Omega_0}\big)\cup\big(O_{T^*\Omega_0}\times WF(\mu)\big) \\ &\qquad\cup\big(WF(\mu)\times WF(\mu)\big), \end{aligned} \tag{6.7}$$

where the sets are interpreted as subsets of $T^*\mathbb{C}^2\setminus 0$, writing elements as either $(z_1,z_2;\zeta_1,\zeta_2)$ or $(z_1,\zeta_1;z_2,\zeta_2)$.

Since $\zeta_1\neq 0$, $\zeta_2\neq 0$ at all points of $C_1$, and $\zeta_1=0 \iff \zeta_2=0$ on $C_3$, the relation $C_1\cup C_3$, when applied to the first two terms on the RHS of (6.7), gives the empty set.

On the other hand, $C_1\cup C_3$, when applied to $WF(\mu)\times WF(\mu)$, contributes nontrivially to $WF(\widehat{\omega}_1^{z_0})$. First, the application of $C_3$ gives

$$\Big\{\big(0,e^{i\varphi},\tau,0\big)\big) : \exists\, z_1 \text{ s.t. } (z_1,\tau e^{-i\varphi})\in WF(\mu)\Big\}\subset N^*\big\{t=0\big\}. \tag{6.8}$$

Secondly, $C_1$ yields a contribution to $WF(\widehat{\omega}_1^{z_0})$ contained in what we call the CGO *two-scattering* of $\mu$, defined by

$$\begin{aligned} Sc^{(2)}(\mu) \;:=\; \Big\{\big(&-2\mathrm{Re}(e^{i\varphi}(z_1-z_2)), e^{i\varphi}, \tau, -2\tau\,\mathrm{Im}\,(e^{i\varphi}(z_1-z_2))\big) : \\ &\exists\, z_1,z_2\in\Omega_0 \text{ s.t. } (z_1,\tau e^{-i\varphi}),(z_2,-\tau e^{-i\varphi})\in WF(\mu)\Big\}. \end{aligned} \tag{6.9}$$

Thus, pairs of points in $WF(\mu)$ with spatial coordinates $z_1$, $z_2$ and antipodal covectors $\pm\tau e^{-i\varphi}$ give rise to elements of $WF(\widehat{\omega}_1^{z_0})$ at $t=-2\mathrm{Re}(e^{i\varphi}(z_1-z_2))$. Note that the expression in (6.8) is not necessarily contained in $Sc^{(2)}(\mu)$, even if we allow $z_1=z_2$ in (6.9), since

$WF(\mu)$ is not necessarily symmetric under $(z,\zeta)\to(z,-\zeta)$ (although this does hold for $\mu$ which are smooth with jumps).

It will also be convenient for later use to define

$$Sc^{(0)}(\mu) := N^*\{(t,e^{i\varphi}) : t=0\} \text{ and } Sc^{(1)}(\mu) := C_0 \circ WF(\mu), \tag{6.10}$$

so that the wavefront set analysis so far can be summarized as,

$$WF(\widehat{\omega}_0) \subset Sc^{(1)}(\mu) \text{ and } WF(\widehat{\omega}_1) \subset Sc^{(0)}(\mu) \cup Sc^{(2)}(\mu). \tag{6.11}$$

This is extended to general $WF(\widehat{\omega}_n)$ in (7.6) below.

**Remarks.**

(1) Note that if the $\widehat{\omega}_1^{z_0}$ are averaged out using a function $a(z_0)$ on $\partial\Omega$ as was done for $\widehat{\omega}_0$, the wavefront analysis above is still valid for the resulting $\widehat{\omega}_1^a$, and we will refer to either as simply $\widehat{\omega}_1$ in the following discussion.

(2) It follows from (6.8) that for any $\mu$ with $\mu \notin C^\infty$, and any $z_0 \in \partial\Omega$, we always will see singularities of $\widehat{\omega}_1$ at $t=0$. The only dependence on $\mu$ of these artifacts in $WF(\widehat{\omega}_1)$ is the question of for which incident directions $\varphi$ of the complex plane wave do they occur, as dictated by (6.8).

(3) In addition, by (6.9), any spatially separated singularities of $\mu$ with antipodal covectors $\pm\zeta = \pm(\xi,\eta)$ give rise to singularities of $\widehat{\omega}_1$ at $t = -2\mathrm{Re}(e^{i\varphi}(z_1-z_2)), \varphi = -\arg(\zeta)$. Under translations, neither the covectors nor the differences $z_1-z_2$ associated to such scatterings change, although the factor $(z_1-z)^{-1}$ in the kernel (6.3), which is evaluated at $z=z_0$, does. Hence, the locations and orders of these artifacts (but not their magnitude or phase) are essentially independent of translations within $\Omega_0$ of inclusions present in $\mu$.

Given the invertibility of $T_0^a$ mod $C^\infty$ (at least for constant weight $a(\cdot)$), from the point of view of our reconstruction method, the singularities of $\widehat{\omega}_1^a$ at $t=0$ and at $Sc^{(2)}(\mu)$, although part of $\widehat{\omega}$, produce artifacts which interfere with reconstruction of the singularities of $\mu$ and should either be better characterized or filtered out. In the next subsection, we do the former for a class of $\mu$ which includes those which are piecewise smooth with jumps.

6.2. **Bilinear operator theory.** Not only is $WF(K_1^{z_0}) \subset \Lambda_1 \cup \Lambda_3$, but in fact $K_1^{z_0}$ belongs to the class of nested conormal distributions associated with the pair $L_1 \supset L_3$ (see [23]), and thus to the Lagrangian distributions associated with the cleanly intersecting pair $\Lambda_1$, $\Lambda_3$:

$$K_1^{z_0} \in I^{1,0}(\Lambda_1, \Lambda_3) + I^{1,-1}(\Lambda_1, \Lambda_3).$$

$K_1^a$ is a linear superposition of these and thus belongs to the same class. The *linear* operators $T_1^{z_0}$, $T_1^a : \mathcal{E}'(\Omega_0 \times \Omega_0) \to \mathcal{D}'(\mathbb{R} \times \mathbb{S}^1)$ with Schwartz kernels $K_1^{z_0}$, $K_1^a$, resp., which we will refer to simply as $T_1$, thus belong to a sum of spaces of singular Fourier integral operators, $I^{1,0}(C_1, C_3)+I^{1,-1}(C_1, C_3)$, and have some similarity to singular Radon transforms ([67]; see also [23]), but (i) this underlying geometry has to our knowledge not been studied before; and (ii) we are interested in *bilinear* operators with these kernels. Rather than pursuing optimal bounds for $T_1$ on function spaces, we shall focus on the goal of characterizing the singularities of $\widehat{\omega}_1$ when $\mu$ is piecewise smooth with jumps. We will show that, away from $t = 0$, $\widehat{\omega}_1$ is $1/2$ derivative smoother than $\widehat{\omega}_0$. On the other hand, at $t = 0$ it is possible for $\widehat{\omega}_1$ to be as singular as the strongest singularities of $\widehat{\omega}_0$; this is present in the full $\widehat{\omega}$ (computed from the DN data) and produces strong artifacts, which can be seen in numerics when attempting to reconstruct $\mu$. For this reason, data should be either preprocessed by filtering out a neighborhood of $t = 0$ before applying backprojection, or alternatively resort to the subtraction techniques discussed in Section 8.

It will be helpful to work (as in the setup of Ex. 4.9) in the slightly greater generality of distributions (still denoted $\mu$) that are, for some order $m \in \mathbb{R}$, conormal for a curve $\gamma \subset \Omega_0$, given by the oscillatory integral (5.11). For such a $\mu$ (even for one not coming from a conductivity), we may still define both $\widehat{\omega}_0^{z_0}$ and $\widehat{\omega}_0^a$ (denoted generically by $\widehat{\omega}_0$), and they belong to $I^{m+\frac{1}{2}}(\widetilde{\Gamma})$, where $\widetilde{\Gamma} = C_0 \circ N^*\gamma \subset T^*(\mathbb{R} \times \mathbb{S}^1) \setminus 0$ is as in (5.13). We also define $\widehat{\omega}_1 := T_1^{z_0}(\mu \otimes \mu)$ or $T_1^a(\mu \otimes \mu)$.

To make the microlocal analysis of $\widehat{\omega}_1$ tractable, we now impose a curvature condition on $\gamma$: Since $\nabla g(z) \perp T_z\gamma$ at a point $z \in \gamma$, we have $i\nabla g(z) \in T_z g$; thus, $\gamma$ has nonzero Gaussian curvature at $z$ iff

$$(i\nabla g(z))^t \nabla^2 g(z)(i\nabla g(z)) \neq 0, \tag{6.12}$$

which *we henceforth assume holds at all points of* $\gamma$ (or at least at all $z \in$ sing supp $\mu \subset \gamma$, which is all that matters).

Note that (6.12) implies the finite order tangency condition referred to in the Example of §5.1, so that for each $e^{i\varphi} \in \mathbb{S}^1$, $\widehat{\omega}_0(\cdot, e^{i\varphi})$ is singular at a finite number of values $t = t_j(e^{i\varphi})$.

**Theorem 6.1.** *Under the curvature assumption (6.12),*

*(i) $Sc^{(2)}(\mu)$, defined as in (6.9), is a smooth Lagrangian manifold in $T^*(\mathbb{R}\times\mathbb{S}^1)\setminus 0$; and*

*(ii) if $\mu$ is as in (5.11) for some $m\in\mathbb{R}$, then*

$$\widehat{\omega}_1 = T_1^{z_0}(\mu\otimes\mu) \in I^{2m+\frac{3}{2},-\frac{1}{2}}\big(Sc^{(2)}(\mu), Sc^{(0)}(\mu)\big). \tag{6.13}$$

Microlocally away from $\Lambda_0\cap\Lambda_1$, a distribution $u\in I^{p,l}(\Lambda_0,\Lambda_1)$ belongs to $I^p(\Lambda_1\setminus\Lambda_0)$ and to $I^{p+l}(\Lambda_0\setminus\Lambda_1)$ [60, 25]. Thus, $\widehat{\omega}_1\in I^{2m+1}\left(Sc^{(2)}(\mu)\right)$ on $Res^{(2)}(\mu)\setminus N^*\{t=0\}$ and hence is smoother than $\widehat{\omega}_0\in I^{m+\frac{1}{2}}(\widetilde{\Gamma})$ if $m<-\frac{1}{2}$. In contrast, on $N^*\{t=0\}\setminus Sc^{(2)}(\mu)$, one has $\widehat{\omega}_1\in I^{2m+\frac{3}{2}}(N^*\{t=0\})$, which is guaranteed to be smoother than $\widehat{\omega}_0$ only if $m<-1$.

In particular, for $m=-1$, corresponding to $\sigma$, and hence $\mu$, being piecewise smooth with jumps, one has $\widehat{\omega}_1\in I^{-1}(Sc^{(2)}(\mu))$, while $\widehat{\omega}_0\in I^{-\frac{1}{2}}(\widetilde{\Gamma})$, so that these artifacts are $1/2$ derivative smoother than the faithful image of $\mu$ encoded by $\widehat{\omega}_0$. On the other hand, the singularity of $\widehat{\omega}_1$ at $N^*\{t=0\}$) can be just as strong as the singularity of $\widehat{\omega}_0$ at $\widetilde{\Gamma}$.

To summarize: for conductivities with jumps, applying standard Radon transform backprojection methods to the full data $\widehat{\omega}$, or even its approximation $\widehat{\omega}_0+\widehat{\omega}_1$, rather than just $\widehat{\omega}_0$ (which is not measurable directly) can result in artifacts which are smoother than the leading singularities only if one filters out a neighborhood of $t=0$.

To see (i) and (ii), start by noting from (6.3) that $T_1(\mu\otimes\mu)(t,e^{i\varphi})$ is a sum of two terms of the form

$$\int e^{i\Phi}\, a_{p,l}(*;\tau;\sigma)\, b_m(z_1;\theta_1)\, b_m(z_2;\theta_2)\, d\theta_1\, d\theta_2\, dz_1\, dz_2\, d\sigma\, d\tau, \tag{6.14}$$

where (recalling that $g$ is a defining function for $\gamma$),

$$\begin{aligned}\Phi \quad &= \Phi(t,e^{i\varphi},z_1,z_2,\tau,\sigma,\theta_1,\theta_2)\\ &:= \tau(t+2Re(e^{i\varphi}(z_1-z_2)))+\sigma\cdot(z_1-z_2)+\theta_1 g(z_1)+\theta_2 g(z_2),\end{aligned} \tag{6.15}$$

$b_m\in S^m_{1,0}(\Omega_0\times(\mathbb{R}\setminus 0))$, and the $a_{p,l}$ are product-type symbols satisfying

$$|\partial^\gamma_{t,\varphi,z_1,z_2}\partial^\beta_\sigma\partial^\alpha_\tau a_{p,l}(*;\tau;\sigma)| \lesssim <\tau>^{p-\alpha}<\sigma>^{l-|\beta|}$$

on $(\mathbb{R}\times\mathbb{S}^1\times\Omega_0\times\Omega_0)\times\mathbb{R}_\tau\times\mathbb{R}^2_\sigma$, (the $*$ denoting all of the spatial variables) of bi-orders $(p,l)=(2,-1)$ and $(1,0)$, resp. As can be seen from (6.5),(6.6),

$$C_1,\, C_3\subset\big\{\zeta_2=-\zeta_1,\, |\zeta_1|=2|\tau|\big\}\subset\big\{|\zeta_1|=|\zeta_2|=2|\tau|\big\},$$

so one can microlocalize the amplitudes in (6.14) to $\{|\theta_1| \sim |\theta_2| \sim |\tau|\}$ and thus replace the $a_{p,l} \cdot b_m \cdot b_m$ by amplitudes

$$a_{p+2m,l}\,(*;(\tau,\theta_1,\theta_2)\,;\sigma) \in S^{p+2m,l}(\mathbb{R}\times\mathbb{S}^1\times\Omega_0\times\Omega_0\times(\mathbb{R}^3_{\tau,\theta_1,\theta_2}\setminus 0)\times\mathbb{R}^2_\sigma)$$

with bi-orders $(2m+2,-1)$ and $(2m+1,0)$, resp.

Now homogenize the variables $z_1$, $z_2$, by defining phase variables $\eta_j := \tau z_j\; j = 1,2$. In terms of the estimates for derivatives, the new phase variables are grouped with the elliptic variables $(\tau,\theta_1,\theta_2)$; furthermore, the change of variables involves a Jacobian factor of $\tau^{-4}$, so that, mod $C^\infty$, (6.14) becomes

$$\int e^{i\tilde\Phi}\, a_{\tilde p,\tilde l}\big(*;(\tau,\theta_1,\theta_2,\eta_1,\eta_2);\sigma\big)\, d\tau\, d\theta_1\, d\theta_2\, d\eta_1\, d\eta_2\, d\sigma, \tag{6.16}$$

with

$$\begin{aligned}\tilde\Phi &= \tilde\Phi(t,e^{i\varphi};\,\tau,\theta_1,\theta_2,\eta_1,\eta_2;\,\sigma)\\ &:= \tau t + 2Re\big(e^{i\varphi}(\eta_1-\eta_2)\big) + \theta_1 g\big(\frac{\eta_1}{\tau}\big) + \theta_2 g\big(\frac{\eta_2}{\tau}\big) + \sigma\cdot\big(\frac{\eta_1-\eta_2}{\tau}\big)\end{aligned} \tag{6.17}$$

on $(\mathbb{R}\times\mathbb{S}^1)\times(\mathbb{R}^7_{\tau,\theta_1,\theta_2,\eta_1,\eta_2}\setminus 0)\times\mathbb{R}^2_\sigma$ and with amplitude bi-orders $(\tilde p,\tilde l) = (2m-2,-1)$ and $(2m-3,0)$, resp. We interpret $\tilde\Phi$ as (a slight variation of) a multi-phase function in the sense of Mendoza [61]: one can check that $\tilde\Phi_0 := \tilde\Phi|_{\sigma=0}$ is a nondegenerate phase function (i.e., clean with excess $e_0 = 0$) which parametrizes $Sc^{(2)}(\mu)$ (which is thus a smooth Lagrangian). One does this by verifying, using (6.12), that $d^2_{(t,\phi,\tau,\theta_1,\theta_2,\eta_1,\eta_2),(\tau,\theta_1,\theta_2,\eta_1,\eta_2)}\tilde\Phi_0$ has maximal rank $(=7)$ at $d_{(\tau,\theta_1,\theta_2,\eta_1,\eta_2)}\tilde\Phi_0 = 0$. On the other hand, the full phase function $\tilde\Phi$ parametrizes $N^*\{t=0\}$, but rather than being nondegenerate, is clean with excess $e_1 = 1$, i.e., $d^2_{(t,\phi,\tau,\theta_1,\theta_2,\eta_1,\eta_2,\sigma),(\tau,\theta_1,\theta_2,\eta_1,\eta_2,\sigma)}\tilde\Phi$ has constant rank $9-1=8$ at $d_{(\tau,\theta_1,\theta_2,\eta_1,\eta_2,\sigma)}\tilde\Phi = 0$. (See [38] for a discussion of clean phase functions.) A slight modification of the results in [61] yields the following.

**Proposition 6.1.** *Suppose two smooth conic Lagrangians $\Lambda_0$, $\Lambda_1 \subset T^*\mathbb{R}^n\setminus 0$ intersect cleanly in codimension $k$. Let $\phi(x,\theta,\sigma)$ be a phase function on $\mathbb{R}^n\times(\mathbb{R}^{N+M}\setminus 0)$ be such that parametrizes $\Lambda_1$ cleanly with excess $e_1\ge 0$ and $\phi(x,\theta) := \phi|_{\sigma=0}$ parametrizes $\Lambda_0$ cleanly with excess $e_0\ge 0$. Suppose further that $a\in S^{\tilde p,\tilde l}\big(\mathbb{R}^n\times\big(\mathbb{R}^N\setminus 0\big)\times\mathbb{R}^M\big)$. Then,*

$$u(x) := \int_{\mathbb{R}^{N+M}} e^{i\phi_1(x,\theta,\sigma)} a(x,\theta,\sigma)\, d\theta\, d\sigma \in I^{p',l'}(\Lambda_0,\Lambda_1),$$

*with*

$$p' = \tilde p + \tilde l + \frac{N+M+e_0+e_1}{2} - \frac{n}{4},\quad l' = -\tilde l - \frac{M+e_1}{2}.$$

Applying the Prop. to each of the two bi-orders $(\tilde{p},\tilde{l}) = (2m-2,-1)$ and $(2m-3,0)$ from above, we see that $T_1^{z_0}(\mu\otimes\mu)$, as given by the expression (6.16) is a sum of two terms,

$$\widehat{\omega}_1^{z_0} = T_1^{z_0}(\mu\otimes\mu) \in \big(I^{2m+\frac{3}{2},-\frac{1}{2}} + I^{2m+\frac{3}{2},-\frac{3}{2}}\big)\big(Sc^{(2)}(\mu), N^*\{t=0\}\big).$$

Recalling that that $N^*\{t=0\} =: Sc^{(0)}(\mu)$ and also that $I^{p',l''}\subset I^{p',l'}$ for $l''\leq l'$, this yields (6.13), finishing the proof of Thm. 6.1. □

## 7. Higher order terms

7.1. **Multilinear wavefront set analysis.** For $n\geq 2$, and for any conductivity $\sigma$, one can analyze $WF\big(\widehat{\omega}_n^{z_0}\big)$ and $WF\big(\widehat{\omega}_n^{a}\big)$ by $(n+1)-$linear versions of the case $n=1$ treated in §§6.1, starting with the kernels. For $\widehat{\omega}_n^{z_0}$, we denote these by $K_n(t,e^{i\varphi},z_1,\ldots,z_{n+1})$, i.e., $\widehat{\omega}_n^{z_0}$ is given by

$$\begin{aligned}\widehat{\omega}_n^{z_0}(t,e^{i\varphi}) &= T_n^{z_0}(\mu\otimes\cdots\otimes\mu)\\ &:= \int_{\mathbb{C}^{n+1}} K_n^{z_0}(t,e^{i\varphi};z_1,\ldots,z_{n+1})\,\mu(z_1)\cdots\mu(z_{n+1})\,d^2z_1\cdots d^2z_{n+1}. \qquad (7.1)\end{aligned}$$

The kernel for $\widehat{\omega}_n^{a}$ has the same geometry and orders, but amplitudes $a(\cdot)$-averaged in $z_0$, which does not affect the following analysis.

$K_n^{z_0}$ is a sum of $2^n$ terms of the form, for $\vec{\epsilon}\in\{0,1\}^n$,

$$c_{\vec{\epsilon}}\cdot\frac{\delta^{(n+1-|\vec{\epsilon}|)}\Big(t+(-1)^n\,2\mathrm{Re}\Big(e^{i\varphi}\sum_{j=1}^{n+1}(-1)^j z_j\Big)\Big)}{(z_0-z_1)(\overline{z}_1-\overline{z}_2)^{1+\epsilon_1}(\overline{z}_2-\overline{z}_3)^{1+\epsilon_2}\cdots(\overline{z}_n-\overline{z}_{n+1})^{1+\epsilon_n}}, \qquad (7.2)$$

each with total homogeneity $-(2n+3)$ in $(t,z_0,\ldots,z_{n+1})$. These have singularities all in the same locations, namely on a lattice of submanifolds of $\mathbb{R}\times\mathbb{S}^1\times\mathbb{C}^{n+1}$. For each $J\in\mathcal{J}=\{J;\ J\subset\{1,\ldots,n\}\}$, as in (4.14) let

(7.3)

$$L_n^J := \Big\{t+(-1)^n\,2\mathrm{Re}\left(e^{i\varphi}\sum_{j=1}^{n+1}(-1)^j z_j\right)=0;\ z_j-z_{j+1}=0,\forall j\in J\Big\}.$$

One has $codim(L_n^J) = 1+2|J|$ and $L_n^J\supset L_n^{J'}$ iff $J\subset J'$. Rather than using set notation, we sometimes simply list the elements of $J$. The unique maximal element of the lattice is the hypersurface,

$$L_n^{\phi} := \Big\{t+(-1)^n\,2\mathrm{Re}\left(e^{i\varphi}\sum_{j=1}^{n+1}(-1)^j z_j\right)=0\Big\},$$

while the unique minimal one is

$$L_n^{12\ldots n} = \Big\{t=0,\ z_1=z_2=\cdots=z_{n+1}\Big\}.$$

(This notation is almost consistent with that used earlier for $n = 0, 1$: what we previously denoted $L_0 = L_0^\phi$, $L_1 = L_1^\phi$ and $L_3 = L_1^1$.)

As stated above,

$$sing\, supp(K_n^{z_0}) = \bigcup_{J\in\mathcal{J}} L_n^J$$

and in fact,

$$WF(K_n^{z_0}) = \bigcup_{J\in\mathcal{J}} N^* L_n^J, \tag{7.4}$$

with the equality (rather than just containment) in (7.4) following from the nonvanishing in all directions at infinity of the Fourier transforms of $\delta^{(m)}$, $\overline{z}^{-1}$ and $\overline{z}^{-2}$.

Define canonical relations

$$C_n^J := N^*(L_n^J)' \subset \big(T^*(\mathbb{R}\times\mathbb{S}^1)\times T^*\mathbb{C}^{n+1}\big)\setminus 0,$$

sometimes also denoting $C_n^\phi$ simply by $C_n$. Then the linear operator $T_n^{z_0} : \mathcal{E}'(\mathbb{C}^{n+1}) \to \mathcal{D}'(\mathbb{R}\times\mathbb{S}^1)$ with kernel $K_n^{z_0}$ is a kind of generalized Fourier integral operator associated with the lattice $\{C_n^J : J \in \mathcal{J}\}$ of intersecting canonical relations. In any case, we can describe the wavefront relation as follows. Let $\widetilde{\Sigma}^m$ denote the alternating sum

$$\widetilde{\Sigma}^m := z_1 - z_2 + \cdots + (-1)^{m+1} z_m$$

.

**Definition 7.1.** *In $T^*(\mathbb{R}\times\mathbb{S}^1)\setminus 0$, define*

$$Sc^{(0)}(\mu) = \big\{(0, e^{i\varphi}, \tau, 0) : \exists z \in \Omega \text{ s.t. } (z, \tau e^{-i\varphi}) \in WF(\mu)\big\} \subset N^*\{t = 0\},$$

*and, for $m \geq 1$, let*

$$\begin{aligned} Sc^{(m)}(\mu) \;=\; \Big\{ &\big((-1)^{m+1} 2Re(e^{i\varphi}\widetilde{\Sigma}^m), e^{i\varphi}, \tau, (-1)^m 2\tau\, Im\,(e^{i\varphi}\widetilde{\Sigma}^m)\big) : \\ &\exists\, z_1, \ldots, z_m \text{ s.t.} \\ &(z_j, (-1)^{j+1}\tau e^{-i\varphi}) \in WF(\mu),\ 1 \leq j \leq m\Big\}. \end{aligned} \tag{7.5}$$

Def. 7.1 extends the definitions (6.10) for $m = 0, 1$ and (6.9) for $m = 2$. The next theorem extends the WF containments (6.11) for $\widehat{\omega}_0$, $\widehat{\omega}_1$, to higher $n$, locating microlocally the singularities of $\widehat{\omega}_n$. We have

**Theorem 7.2.** *For any conductivity $\sigma$ and all $n \geq 0$,*

$$WF(\widehat{\omega}_n) \subset \bigcup \Big\{ Sc^{(m)}(\mu) : 0 \leq m \leq n+1,\ m \equiv n+1 \ mod\ 2\Big\}. \tag{7.6}$$

*Proof.* This will follow from (7.1) and the Hörmander-Sato lemma [37]. First, to formulate the $(n+1)$-fold version of (6.7), we introduce the following notation. For sets $A$, $B \subset T^*\mathbb{C}$ and

$$I \in \mathcal{I} := \big\{ I;\ I \subset \{1, \dots, n+1\} \big\}$$

let

$$\begin{aligned} \prod_{i \in I} A_i \quad \times \quad & \prod_{i' \in I^c} B_{i'} \\ := \quad & \big\{ (z, \zeta) \in T^*\mathbb{C}^{n+1} : (z_i, \zeta_i) \in A,\ \forall i \in I, \\ & \qquad\qquad (z_{i'}, \zeta_{i'}) \in B,\ \forall i' \in I^c \big\}. \end{aligned}$$

For $I \in \mathcal{I}$, if we set

$$WF^I(\mu) := \prod_{i \in I} WF(\mu)_i \times \prod_{i' \in I^c} 0_{T^*\mathbb{C}, i'}, \tag{7.7}$$

then the analogue of (6.7), which follow from it by induction, is:

$$WF(\otimes^{n+1}\mu) \subset \bigcup_{I \in \mathcal{I},\, I \neq \phi} WF^I(\mu). \tag{7.8}$$

Next, for $J \in \mathcal{J}$, define

$$\overline{J} := \{ i \in \{1, \dots, n+1\} : i \in J \text{ or } i - 1 \in J \} \in \mathcal{I}.$$

Then, $|\overline{J}|$ is even, and thus

$$|\overline{J}^c| = |\{1, \dots, n+1\} \setminus \overline{J}| \equiv n + 1 \mod 2.$$

We can partition $\overline{J} = \overline{J}_+ \cup \overline{J}_- \cup \overline{J}_\pm$, where

$$\begin{aligned} \overline{J}_+ &:= \{ i \in \overline{J} :\ i \in J,\ i - 1 \notin J \} \\ \overline{J}_- &:= \{ i \in \overline{J} :\ i - 1 \in J,\ i \notin J \} \\ \overline{J}_\pm &:= \{ i \in \overline{J} :\ i - 1 \in J,\ i \in J \}. \end{aligned} \tag{7.9}$$

The submanifold $L_n^J \subset \mathbb{R} \times \mathbb{S}^1 \times \mathbb{C}^{n+1}$ is given by defining functions $f_0$, $\{f_j\}_{j \in J}$, where

$$f_0(t, \varphi, z) = t + (-1)^n 2\mathrm{Re} \left( e^{i\varphi} \sum_{i=1}^{n+1} (-1)^i z_i \right),$$

and

$$f_j(t, \varphi, z) = z_j - z_{j+1},\ j \in J.$$

The twisted conormal bundles are parametrized by

$$C_n^J = \Big\{ \left( t, \varphi, \tau d_{t,\varphi} f_0; z, -\left( \tau d_z f_0 + \sum_{j\in J} \sigma_j \cdot d_z f_j \right) \right) : \\ (t, e^{i\varphi}, z) \in L_n^J,\ (\tau, \sigma) \in (\mathbb{R} \times \mathbb{C}^{|J|}) \setminus 0 \Big\}.$$

The twisted gradients $df' := (d_{t,\varphi} f, -d_z f)$ of the defining functions are

$$df_0' = \left( 1, (-1)^n \, 2 \operatorname{Im} \left( e^{i\varphi} \sum_{i=1}^{n+1} (-1)^i \, z_i \right), (-1)^{n+1} \, 2E(\varphi) \right),$$

with $E(\varphi) = (e^{-i\varphi}, -e^{-i\varphi}, e^{-i\varphi}, \ldots, (-1)^{n+1} e^{-i\varphi})$, where we identify $\pm e^{-i\varphi} \in \mathbb{C}$ with a real covector $(\xi_i, \eta_i) \in T^*\mathbb{C}$, and

$$df_j' = -\sigma_j \cdot dz_j + \sigma_j \cdot dz_{j+1},\ j \in J,$$

similarly identifying $\sigma_j \in \mathbb{C}$ with $(\operatorname{Re} \sigma_j,\ \operatorname{Im} \sigma_j) \in T^*\mathbb{C}$. Thus,

$$\begin{aligned} C_n^J = \Big\{ \Big( & (-1)^{n+1} 2\mathrm{Re}(e^{i\varphi} \sum_{i=1}^{n+1} (-1)^i z_i), e^{i\varphi}, \tau, (-1)^n 2\tau \operatorname{Im}(e^{i\varphi} \sum_{i=1}^{n+1} (-1)^i z_i); \\ & z, (-1)^{n+1} 2\tau E(\varphi) + \sum_{i\in \overline{J}_+} \sigma_i \cdot dz_i - \sum_{i\in \overline{J}_-} \sigma_i \cdot dz_i \\ & \qquad + \sum_{i\in \overline{J}_\pm} (-\sigma_{i-1} + \sigma_i) \cdot dz_i \Big) : \\ & e^{i\varphi} \in \mathbb{S}^1,\ z_j - z_{j+1} = 0,\ j \in J,\ (\tau, \sigma) \in (\mathbb{R} \times \mathbb{C}^{|J|}) \setminus 0 \Big\}. \end{aligned} \tag{7.10}$$

Since $WF(K_n^{z_0})' = \bigcup_{J\in\mathcal{J}} C_n^J$, to prove (7.6), it suffices to show that each of the $2^n(2^{n+1}-1)$ compositions $C_n^J \circ WF^I$, $J \in \mathcal{J}$, $I \in \mathcal{I} \setminus \{\phi\}$, is contained in one of the $Sc^{(m)}(\mu)$ for some $0 \le m \le n+1$ with $m \equiv n+1 \bmod 2$. In fact, from (7.7) and the representation of $C_n^J$ above, one sees that each $C_n^J \circ WF^I$ is either empty (e.g., if $\overline{J}^c \cap I^c \neq \phi$), or a (potentially) nonempty subset of $Sc^{(m)}(\mu)$, when $m = |\overline{J}^c| \equiv n+1 \bmod 2$, yielding (7.6) and finishing the proof of Thm. 7.2. □

## 8. Parity symmetry

We now come to an important symmetry property which significantly improves the imaging obtained via our reconstruction method. Recall that what we have been denoting $\widehat{\omega}$ is in fact $\widehat{\omega^+}$, the partial Fourier transform of the correction term $\omega^+$ in the CGO solution (3.6) of the

Beltrami equation (3.4) with multiplier $\mu$. Similarly, the solution $\omega^-$ in (3.6) corresponding to $-\mu$ has partial Fourier transform $\widehat{\omega^-}$. Astala and Päivärinta [5] showed that both $\omega^+$ and $\omega^-$ can be reconstructed from the Dirichlet-to-Neumann map $\Lambda_\sigma$. We show that by taking their difference we can suppress the $\widehat{\omega}_n$ for $n$ odd, and thus suppress some of the singularities described in the preceding sections, in particular the strong singularity at $Sc^{(0)}(\mu) \subset N^*\{t=0\}$ coming from $\widehat{\omega}_1$.

Start by writing the two Neumann series,

$$\widehat{\omega^+} \sim \sum_{n=0}^{+\infty} \widehat{\omega_n^+} = \widehat{\omega_{even}^+} + \widehat{\omega_{odd}^+}, \qquad \widehat{\omega^-} \sim \sum_{n=0}^{+\infty} \widehat{\omega_n^-} = \widehat{\omega_{even}^-} + \widehat{\omega_{odd}^-},$$

where $\widehat{\omega_{even}^\pm}$ (resp. $\widehat{\omega_{odd}^\pm}$) consists of the $n$ even (resp. odd) terms in the expansion corresponding to $\widehat{\omega^\pm}$. Recall that $\widehat{\omega_n^\pm}$ is a multilinear of order $n+1$ as a function of $\mu$.

**Proposition 8.1.** *$\widehat{\omega_{even}^+}$ and $\widehat{\omega_{odd}^+}$ have the same parity in $t$ as the multilinearities of their terms, i.e.,*

$$\widehat{\omega_{even}^+} = -\widehat{\omega_{even}^-} \text{ and } \widehat{\omega_{odd}^+} = \widehat{\omega_{odd}^-}. \tag{8.1}$$

*Equivalently,*

$$\widehat{\omega_{even}^+} = \frac{\widehat{\omega^+} - \widehat{\omega^-}}{2} \text{ and } \widehat{\omega_{odd}^+} = \frac{\widehat{\omega^+} + \widehat{\omega^-}}{2}. \tag{8.2}$$

*Proof.* Let $\overline{u}^\pm = -\overline{\partial}\omega^\pm$. As in Sec. 3, $u^\pm$ is the solution of the integral equation (3.14),

$$(I + A^\pm \rho) u^\pm = \mp \overline{\alpha}, \tag{8.3}$$

where $A^\pm = \mp(\overline{\alpha}P + \overline{\nu}S)$, and $\alpha$ and $\nu$ were defined in (3.8). Since $A^+ = -A^-$ we have $u_0^+ = -\overline{\alpha} = -u_0^-$, $u_1^+ = -A^+\overline{u_0^+} = -(-A^-(-\overline{u_0^-})) = u_1^-$ and by induction, for $n \geq 0$,

$$u_{n+2}^+ = A^+\overline{A^+\overline{u}_n^+} = (-1)^{n+1}A^-\overline{A^-\overline{u_n^-}} = (-1)^{n+1}u_{n+2}^-.$$

(Another way of seeing this is that $\mu \to \widehat{\omega}_n$ is an $(n+1)$-linear operator, with the same kernel for both $\pm\mu$.) □

Prop. 8.1 provides a method to isolate the even and the odd terms in the expansion of $\widehat{\omega}$. In particular, we can eliminate the strong singularities of $\widehat{\omega}_1$ at $Sc^{(0)}(\mu) = N^*\{t=0\}$, described in (6.13), and in fact the singularities there of all the terms since, by (7.6), these only arise from $\widehat{\omega}_n$ for $n$ odd.

## 9. Multilinear operator theory

Following the analysis of $\widehat{\omega}_1$, one can also describe the singularities of $\widehat{\omega}_2$, but now having to restrict away from $t = 0$. Recall from above that, if $\mu$ is a piecewise smooth function with jumps ($m = -1$), $\widehat{\omega}_1$ has a singularity at $Sc^{(0)}(\mu) = N^*\{t = 0\}$ as strong as that of $\widehat{\omega}_0$ at $Sc^{(1)}(\mu)$, and that its presence is due to the singularity of $K_1^{z_0}$ at the submanifold $L_1^1 = \{t = 0\} \subset L_1^\phi \subset \mathbb{R} \times \mathbb{S}^1 \times \mathbb{C}^2$. Similarly, in order to analyze $\widehat{\omega}_2$, we will need to localize $K_2^{z_0}$ away from $L_2^{12} = \{t = 0\} \subset \mathbb{R} \times \mathbb{S}^1 \times \mathbb{C}^3$, leaving us with a kernel that can be decomposed into a sum of two kernels, having singularities on each of two nested pairs, $L_2^1 \subset L_2^\phi$ and $L_2^2 \subset L_2^\phi$, but not at $L_2^1 \cap L_2^2 = L_2^{12} = \{t = 0\}$. We will show that applying these to $\mu \otimes \mu \otimes \mu$, as in (7.1), not just results in terms with WF contained in $Sc^{(3)}(\mu) \cup Sc^{(1)}(\mu)$, as shown in Thm. 7.2, but more precisely, we have

**Theorem 9.1.** *If $\mu \in I^m(\gamma)$ with $\gamma$ satisfying the curvature condition (6.12), then $Sc^{(3)}(\mu)$, defined as in (6.9), is a smooth Lagrangian manifold in $T^*(\mathbb{R} \times \mathbb{S}^1) \setminus 0$; and*

$$\widehat{\omega}_2|_{t\neq 0} \in I^{3m+2,-\frac{1}{2}}\left(Sc^{(3)}(\mu), Sc^{(1)}(\mu)\right). \tag{9.1}$$

**Remark.** For $m = -1$, this is in $I^{-1}\left(Sc^{(1)}(\mu) \setminus Sc^{(3)}(\mu)\right)$, and thus is $1/2$ derivative smoother than $\widehat{\omega}_0$ on $Sc^{(1)}(\mu)$. On the other hand, it is also in $I^{-\frac{3}{2}}\left(Sc^{(3)}(\mu) \setminus Sc^{(1)}(\mu)\right)$, which is a full derivative smoother than $\widehat{\omega}_0$.

To put this in perspective we first discuss what should be the leading terms contributing to $\widehat{\omega}_n$ for general $n \geq 2$. The analysis for $\widehat{\omega}_2|_{t\neq 0}$ given below applies more generally to $\widehat{\omega}_n$ if we localize $K_n^{z_0}$ even more strongly: not just away from $t = 0$, but away from *all* of the submanifolds $L_n^J \subset \mathbb{R} \times \mathbb{S}^1 \times \mathbb{C}^{n+1}$ with $|J| \geq 2$. Now, for $j \neq j'$, $L_n^j \cap L_n^{j'} = L_n^{jj'}$; by localizing away from all of the $L_n^J$ with $|J| = 2$, by a partition of unity the kernel $K_n^{z_0}$ can be decomposed into a sum of $n$ terms, each a nested conormal distribution associated with the pair $L_n^\phi \supset L_n^j$, $j = 1, \ldots, n$, resp. When these pieces of $K_n^{z_0}$ are applied to $\otimes^{n+1}\mu$, as in (7.1), the results have WF in $Sc^{(n+1)}(\mu) \cup Sc^{(n-1)}(\mu)$, and again can be shown to belong to $I^{p,l}\left(Sc^{(n+1)}(\mu), Sc^{(n-1)}(\mu)\right)$. However, as this requires localizing away from $\bigcup_{|J|\geq 2} L_n^J$, which is strictly larger than $L_n^{12\cdots n}$ if $n \geq 3$, this analysis is inconclusive concerning the singularities of $\widehat{\omega}_n|_{t\neq 0}$, and thus we only present the details for $\widehat{\omega}_2$.

We now start the proof of Thm. 9.1 by noting that, for $n = 2$, the lattice of submanifolds (7.3) to which the trilinear operator $T_3^{z_0}$ is associated is a simple diamond, $L_2^\phi \supset L_2^1, L_2^2 \supset L_2^{12}$. In the region $\{t \neq 0\}$, the two submanifolds $L_2^1$ and $L_2^2$ are disjoint. Hence, by a partition of unity in the spatial variables, we can write

$$\widehat{\omega}_2|_{t\neq 0} = \langle K_2^1 + K_2^2, \mu\otimes\mu\otimes\mu\rangle, \tag{9.2}$$

where each $K_2^j$ is associated with the nested pair $L_2^\phi \supset L_2^j$, $j = 1, 2$. Since these two terms are so similar, we just treat the $K_2^2$ term.

The submanifolds $L_2^2 \subset L_2^\phi \subset \mathbb{R}\times\mathbb{S}^1\times\mathbb{C}^3$ are given by

$$\begin{aligned} L_2^\phi &= \{t - 2\mathrm{Re}\left(e^{i\varphi}\left(z_1 - z_2 + z_3\right)\right) = 0\} \text{ and} \\ L_2^2 &= \{t - 2\mathrm{Re}\left(e^{i\varphi}\left(z_1 - z_2 + z_3\right)\right) = 0,\ z_2 - z_3 = 0\}. \end{aligned} \tag{9.3}$$

For $K_2^2$ we are localizing away from $L_2^1$, so that $z_1 - z_2 \neq 0$ on the support of the kernels below. Thus, the factors $(\overline{z_1} - \overline{z_2})^{-1+\epsilon_1}$ in (7.2) are smooth, and their dependence on $\epsilon_1$ irrelevant for this analysis. Thus, $K_2^2$ is a sum of two terms, each of which we will still denote $K_2^2$, given by

$$K_2^2 = \int_{\mathbb{R}^3} e^{i[\tau\left(t-2\mathrm{Re}\left(e^{i\varphi}(z_1-z_2+z_3)\right)\right)+(z_2-z_3)\cdot\sigma]} a_{p,l}(*;\tau;\sigma)\, d\tau\, d\sigma, \tag{9.4}$$

where $*$ denotes the spatial variables and $a_{p,l}$ is a symbol-valued symbol of bi-order $(3,-1)$ and $(2,0)$, resp.

If, for any $c > 0$, we introduce a smooth cutoff into the amplitude which is a function of $|\sigma|/|\tau|$ and supported in the region $\{|\sigma| \geq c|\tau|\}$, the amplitude becomes a standard symbol of order $p + l = 2$ in the phase variables $(\tau, \sigma) \in \mathbb{R}^3 \setminus 0$. The phase function is nondegenerate and parametrizes the canonical relation

$$\begin{aligned} C_{0\times N} &:= C_0 \times N^*\{z_2 = z_3\} \\ &= \big\{\big(2\mathrm{Re}\left(e^{i\varphi}z_1\right), e^{i\varphi}, \tau, 2\tau\,\mathrm{Im}\,\left(e^{i\varphi}z_1\right); \\ &\qquad z_1, z_2, z_2, 2\tau e^{-i\varphi}, \zeta_2, -\zeta_2\big) : \\ &\qquad e^{i\varphi} \in \mathbb{S}^1, (z_1, z_2) \in \mathbb{C}^2, (\tau, \zeta_2) \in \mathbb{R}^3 \setminus 0\big\}. \end{aligned}$$

This is a nondegenerate canonical relation: the projection $\pi_R : C_{0\times N} \to T^*\mathbb{C}^3 \setminus 0$ is an immersion and the projection $\pi_L : C_{0\times N} \to T^*(\mathbb{R}\times\mathbb{S}^1) \setminus 0$ is a submersion. Thus, this contribution to $K_2^2$ belongs to $I^{2+\frac{3}{2}-\frac{8}{4}}(C_{0\times N}) = I^{\frac{3}{2}}(C_{0\times N})$. Due to the support of the amplitude of this term, $\pi_R(C_{0\times N}) \subset \{|\zeta_1| \sim |\zeta_2| = |\zeta_3|\}$, and by reasoning similar to that used in the analysis of $\widehat{\omega}_1$, one concludes that $\mu\otimes$

$\mu \otimes \mu \in I^{3m}\left(N^*\left(\gamma \times \gamma \times \gamma\right)\right)$ microlocally on this region. Hence, the transverse intersection calculus applies to the composition $C_{0\times N} \circ N^*\left(\gamma \times \gamma \times \gamma\right) \subset C_0 \circ N^*\gamma =: Sc^{(1)}(\mu)$, and this contribution to $\widehat{\omega}_2$ belongs to

$$I^{3m+\frac{3}{2}}\left(Sc^{(1)}(\mu)\right). \tag{9.5}$$

Now consider the contribution to (9.4) from the region $\{|\sigma| \leq \frac{1}{2}|\tau|\}$. Writing out the representations of each of the three $\mu$ factors in (9.2) as conormal distributions, we first note that, using the parametrization in (7.10) for $C_2^2$ and the constraint $|\sigma| \leq \frac{1}{2}|\tau|$, we can read off that, on $\pi_R$ of the wavefront relation,

$$|\zeta_1| = 2|\tau| \text{ and } |\zeta_j| = |\pm(\sigma - 2\tau e^{-i\varphi})| \geq \frac{3}{2}|\tau|,\ j = 2, 3.$$

Hence, again we are acting on a part of $\mu\otimes\mu\otimes\mu$ which is microlocalized where $|\zeta_1| \sim |\zeta_2| \sim |\zeta_3|$. As a result, in (9.6) below, the $\theta_j$ are grouped with $\tau$ as "elliptic" variables for the symbol-valued symbol estimates. Mimicking the analysis in and following (6.16), homogenize $z_1, z_2, z_3$ by setting $\eta_j = \tau z_j$, $j = 1, 2, 3$. This leads to an expression,

$$\int e^{i\tilde{\Psi}}\, a_{\tilde{p},\tilde{l}}\big(*; (\tau, \theta_1, \theta_2, \theta_3, \eta_1, \eta_2, \eta_3); \sigma\big)\, d\tau\, d\theta_1\, d\theta_2\, d\theta_3\, d\eta_1\, d\eta_2\, d\eta_3\, d\sigma, \tag{9.6}$$

with phase

$$\begin{aligned}
\tilde{\Psi} &= \tilde{\Psi}(t, e^{i\varphi};\, \tau, \theta_1, \theta_2, \theta_3, \eta_1, \eta_2, \eta_3;\, \sigma) \\
&:= \tau t - 2Re\big(e^{i\varphi}(\eta_1 - \eta_2 + \eta_3)\big) + \theta_1 g\big(\frac{\eta_1}{\tau}\big) \\
&\qquad + \theta_2 g\big(\frac{\eta_2}{\tau}\big) + \theta_3 g\big(\frac{\eta_3}{\tau}\big) + \sigma \cdot \big(\frac{\eta_2 - \eta_3}{\tau}\big)
\end{aligned}$$

on $(\mathbb{R} \times \mathbb{S}^1) \times (\mathbb{R}^{10}_{\tau,\theta_1,\theta_2,\theta_3,\eta_1,\eta_2,\eta_3} \setminus 0) \times \mathbb{R}^2_\sigma$ and symbol-valued symbols with bi-orders $(\tilde{p}, \tilde{l}) = (3m - 3, -1)$ and $(3m - 4, 0)$, resp. As with the phase $\tilde{\Phi}$ that arose in the analysis of $\widehat{\omega}_1$, $\tilde{\Psi}$ is a multiphase function: $\tilde{\Psi}_0 = \tilde{\Psi}|_{\sigma=0}$ is nondegenerate (excess $e_0 = 0$) and parametrizes $Sc^{(3)}(\mu)$, while the full $\tilde{\Psi}$ is clean (excess $e_1 = 1$) and parametrizes $Sc^{(1)}(\mu)$. Applying Prop. 6.1, with $N = 10, M = 2$, the terms in (9.6) with amplitudes of bi-order $(3m - 3, -1)$, $(3m - 4, 0)$, resp., yield elements of $I^{3m+2,-\frac{1}{2}}(Sc^{(3)}(\mu), Sc^{(1)}(\mu))$ and $I^{3m+2,-\frac{3}{2}}(Sc^{(3)}(\mu), Sc^{(1)}(\mu))$, resp.; since the former space contains the latter, and furthermore contains the space in (9.5), we conclude that $\widehat{\omega}_2|_{t\neq 0} \in I^{3m+2,-\frac{1}{2}}(Sc^{(3)}(\mu), Sc^{(1)}(\mu))$. This finishes the proof of Thm. 9.1. □

## 10. Computational studies

In the idealized infinite bandwidth model discussed above, knowledge of $\omega_0(z_0, k)$ for all complex frequencies $k$, and thus $T_0^{z_0}\mu = \widehat{\omega}(z_0, t, e^{i\varphi})$ for all $(t,\, e^{i\varphi})$, determines $\mu$ mod $C^\infty$. A more physically realistic model, band limiting to $|k| \leq k_{max}$, requires a windowed Fourier transform. This corresponds to convolving in the $t$ variable with a smooth cutoff at length-scale $\sim k_{max}^{-1}$, rendering the reconstruction less accurate. This section examines numerical simulations and how they are affected by this bandwidth issue.

We first introduce a new reconstruction algorithm from the Dirichlet-to-Neumann map $\Lambda_\sigma$, as well as the algorithm used in the simulations. Then we will present our numerical results. In this section we take $\Omega$ to be the unit disk, $\Omega = D(0, 1)$.

10.1. **Reconstruction algorithm.** The results presented in the preceding sections give rise to a linear reconstruction scheme to approximately recover a conductivity $\sigma$ from its Dirichlet-to-Neumann map $\Lambda_\sigma$. This can be summarized in the following steps:

(i) Find $f_{\pm\mu}(z, k)$, and so $\omega^{\pm}(z, k)$, for $z \in \partial\Omega$ and $k \in \mathbb{C}$, by solving the boundary integral equation

$$f_{\pm\mu}(z, k) + e^{ikz} = (\mathcal{P}_{\pm\mu} + \mathcal{P}_0^k) f_{\pm\mu}(z, k), \qquad z \in \partial\Omega, \tag{10.1}$$

where $\mathcal{P}_{\pm\mu}$ and $\mathcal{P}_0^k$ are projection operators constructed from $\Lambda_\sigma$. See [5] and [63, Section 16.3.3] for full details.

(ii) Write $k = \tau e^{i\varphi}$. Apply the one-dimensional Fourier transform $\mathcal{F}_{\tau\mapsto t}$ and the complex average (5.13) in order to obtain $\widehat{\omega}^{a,\pm}(t, e^{i\varphi})$, with $a \equiv 1/\sqrt{2}$.

(iii) Define $\widehat{\omega}^a_{\text{diff}} = \frac{1}{2}(\widehat{\omega}^{a,+} - \widehat{\omega}^{a,-})$. Applu either the exact inversion formula (5.16) or the $\Lambda$-tomography analogue (5.15) with $\widehat{\omega}^a_{\text{diff}}$ instead of $\widehat{\omega}^a_0$, in order to obtain an approximation $\mu_{\text{appr}}$ to $\mu$.

(iv) The approximate conductivity is found with the identity $\sigma_{\text{appr}} = (1 - \mu_{\text{appr}})/(1 + \mu_{\text{appr}})$.

10.2. **High-precision data assumption.** In the numerical reconstructions presented below, the spectral parameter $k$ ranges in the disk $\{|k| < R\}$ with cutoff frequency $R = 60$. Such a large radius $R$ is needed for demonstrating the crucial properties of the new method; with a smaller radius the windowing of the Fourier transform would smooth out important features in the CGO solutions.

Using such a large $R$ in practice would require very high precision EIT measurements, which cannot be achieved by current technology.

However, it is possible to evaluate the needed CGO solutions computationally when $\sigma$ is known. (Remark: it is possible to compute useful reconstructions from real EIT measurements using the new method combined with sparsity-promoting inversion algorithms, but we do not discuss such approaches further in this paper.) This is done as in [7] by solving the Beltrami equation

$$\overline{\partial}_z f_\mu(z,k) = \mu(z)\,\overline{\partial_z f_\mu(z,k)}, \tag{10.2}$$

which yield very accurate solutions even for large $|k|$. From the point of view of the classical $\bar\partial$ reconstruction method [52, 62, 63, 69] for $C^2$ conductivities, this is the analogue of solving the Lippmann-Schwinger equation to construct the CGO solutions.

In this section the CGO remainders $\omega^{\pm}(z,k)$, with $z \in \partial\Omega$ and $|k| < 60$, are constructed by solving the Beltrami equation following the Huhtanen and Perämäki approach [7, 39] (see also Section 3 for more details). We then follow steps (ii)-(iv) of the algorithm in Section 10.1 to obtain 2D reconstructions.

10.3. **Rotationally symmetric cases.** We study three rotationally symmetric conductivities defined in the unit disc. The first conductivity $\sigma_1$ is smooth. The second conductivity is defined as

$$\sigma_2 = \sigma_1 - 0.3\chi_{D(0,0.6)}$$

and therefore has a jump of magnitude 0.3 along the circle centered at the origin and radius 0.6. The third rotationally symmetric conductivity is defined as

$$\sigma_3 = \sigma_2 + 0.3\chi_{D(0,0.4)}$$

and has jumps of magnitude 0.3 along the circles centered at the origin and radii 0.4 and 0.6.

In Figure 6 we show the profiles of $\widehat{\omega}(1,t,1)$ for three rotationally symmetric conductivity phantoms. The first phantom is smooth, while the second and the third have jumps. The position and the sign of each jump is clearly visible from the CGO-Fourier informations. Note that the artifact singularity appearing around 0 in the second and the third rows vanishes when considering the difference of the two CGO functions, in the forth and fifth rows. This confirms the parity symmetry analysed in Section 8.

10.4. **Half-moon and ellipse (HME).** This conductivity phantom has a large elliptical inclusion and another smaller inclusion inside the ellipse. The smaller inclusion has a jump along an almost complete half-circle. This example was chosen because it has two nontrivial features in the wavefront set for horizontal direction and three for vertical.

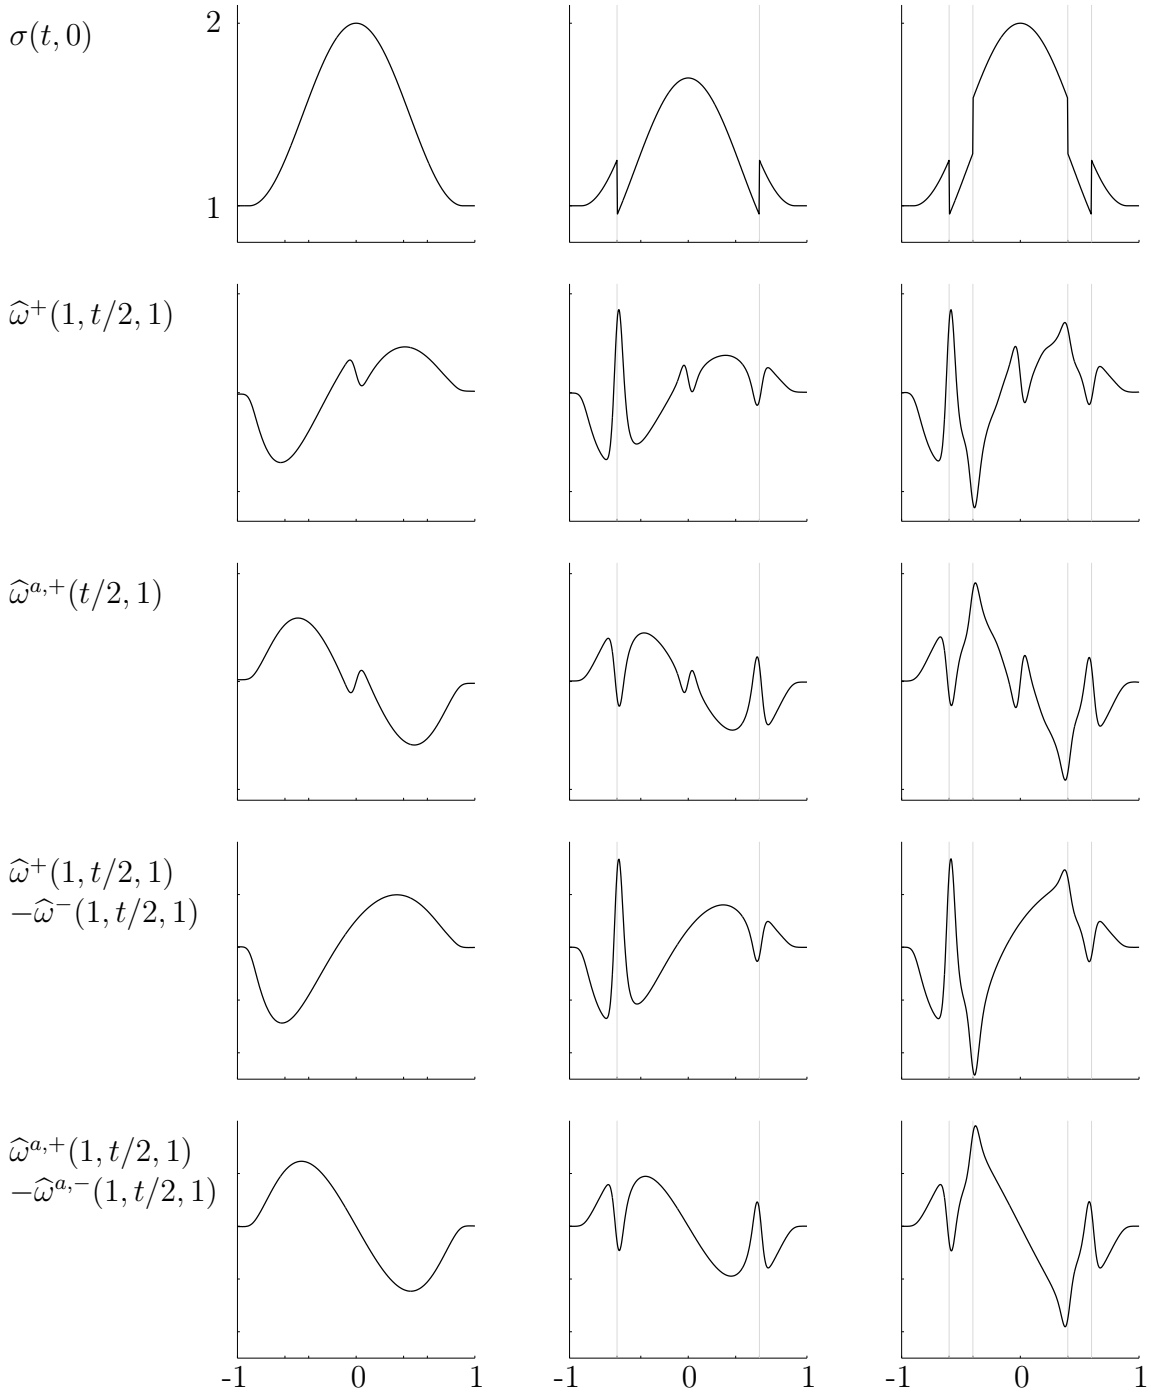


FIGURE 6. Top: profiles along the real axis of three radial conductivities. The middle conductivity has a jump along the circle $|z| = 0.6$, and the one on the right has jumps along the circles $|z| = 0.4$ and $|z| = 0.6$. In 2nd and 3rd rows shown are the functions $\widehat{\omega}^{+}(1, t/2, 1)$ and $\widehat{\omega}_a^{+}(t/2, 1)$; note the artifacts at $t = 0$. The artifacts cancel out by subtracting the minus terms.

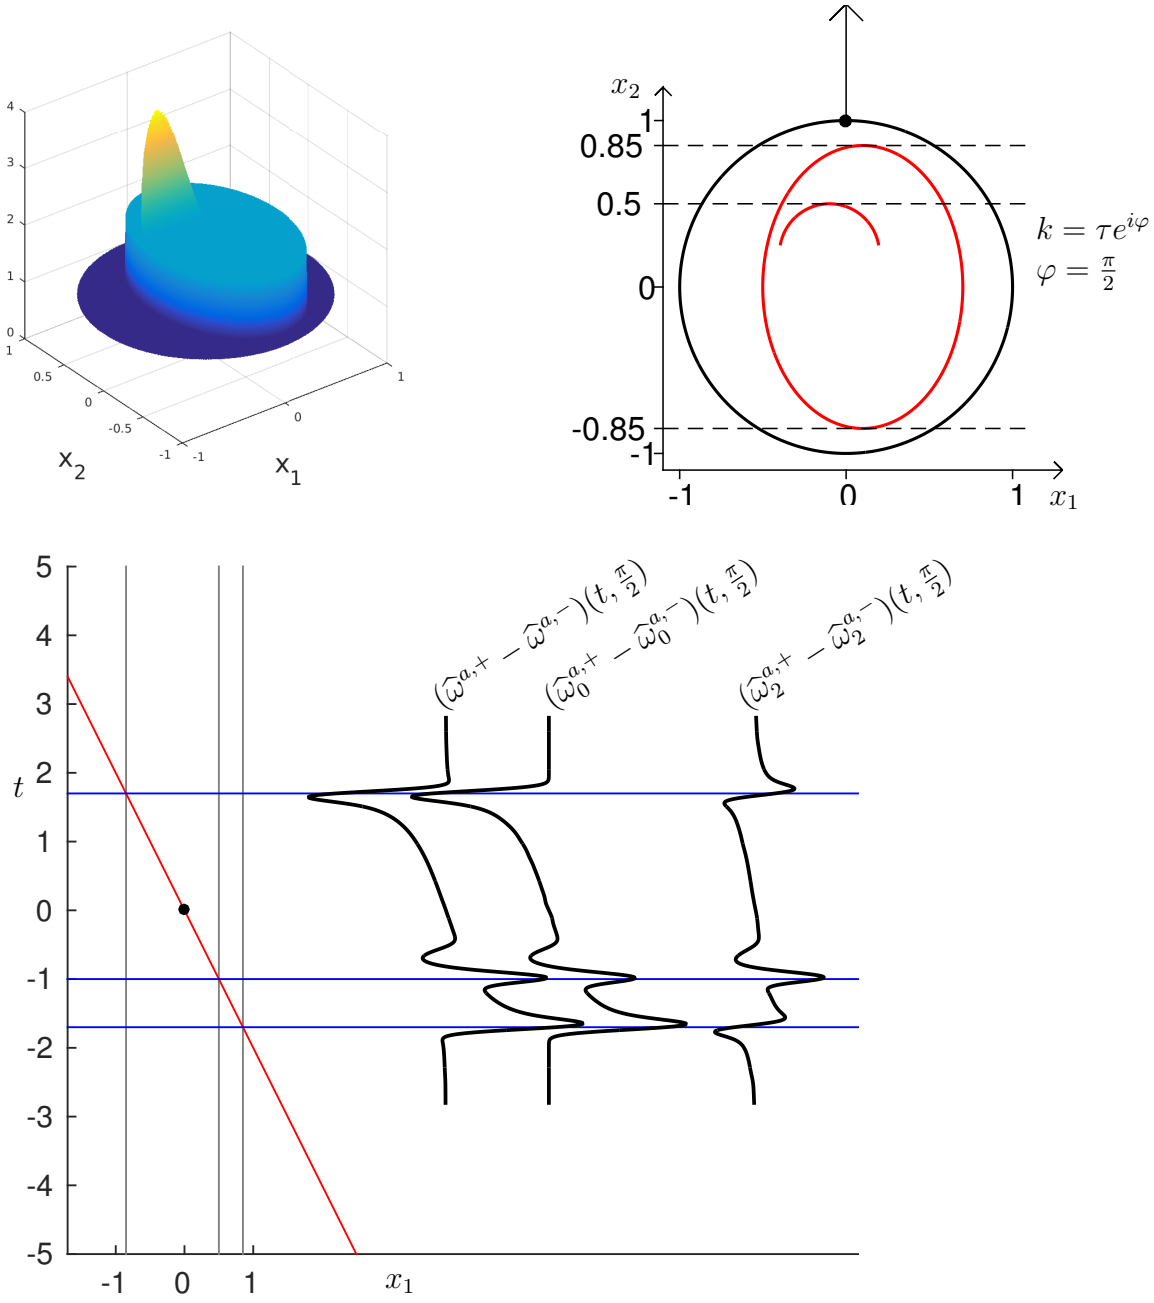


FIGURE 7. Diagram showing the propagation of singularities for the HME phantom with zero background. The virtual direction is $k = i$.

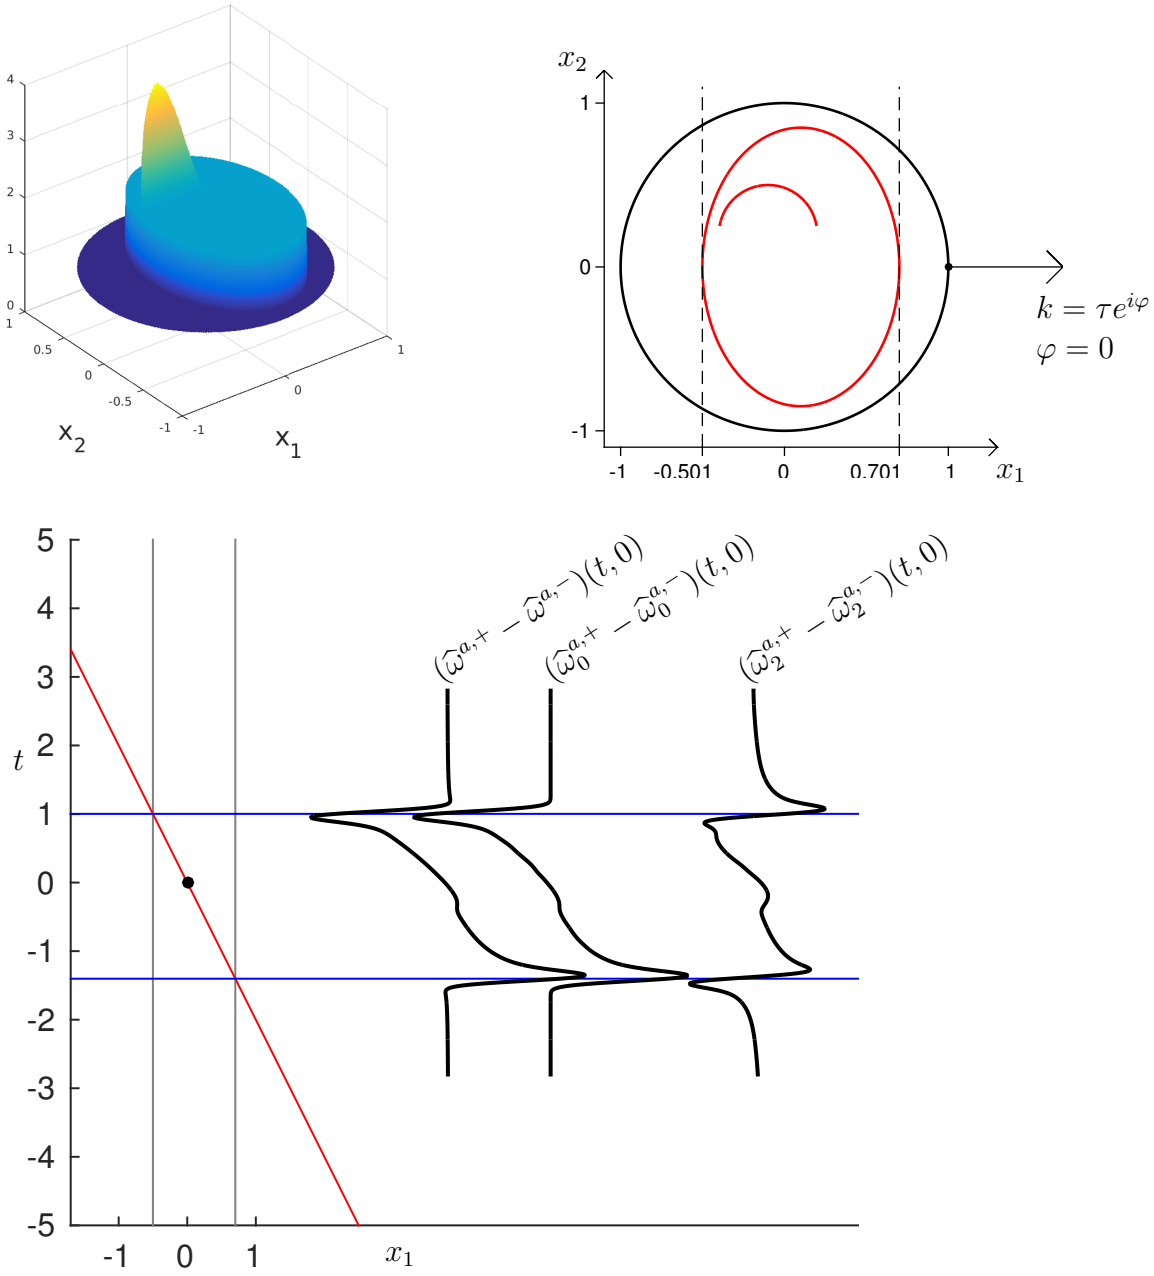


FIGURE 8. Diagram showing the propagation of singularities for the HME phantom with zero background. The virtual direction is $k = 1$.

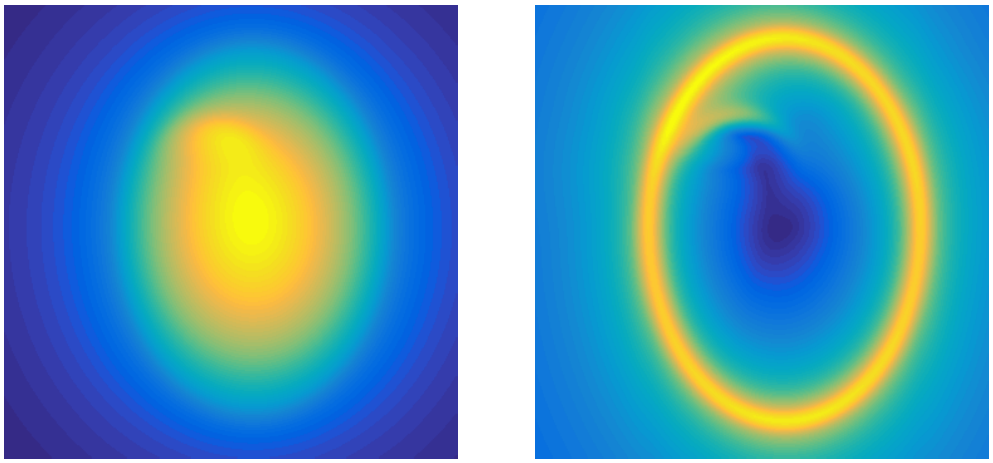

FIGURE 9. Reconstructions from the averaged full series $\widetilde{\omega}^a_{\text{diff}}$. Left: exact inversion formula. Right: $\Lambda$-tomography like reconstruction.

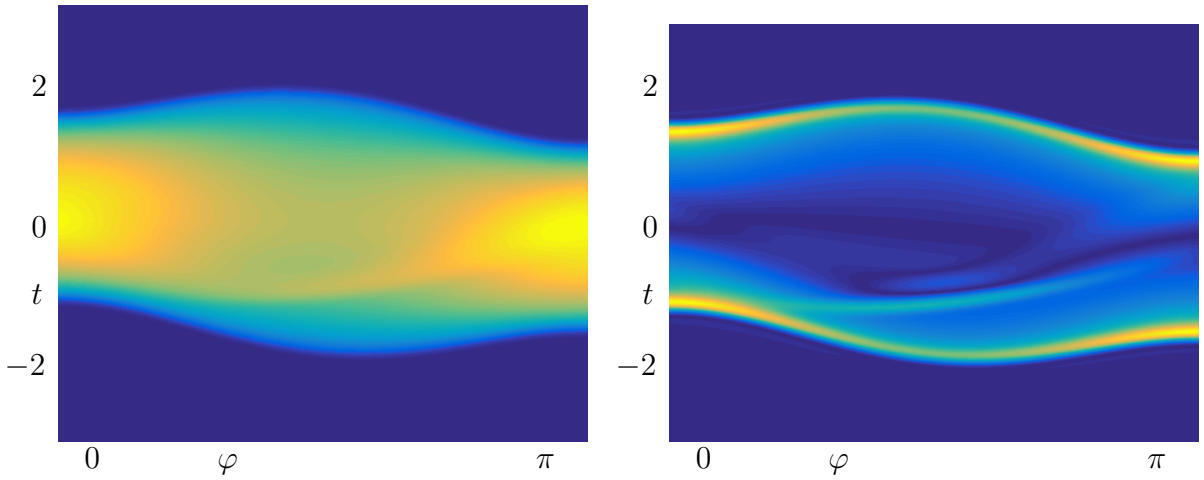


FIGURE 10. Sinograms of the averaged full series $\widetilde{\omega}^a_{\text{diff}}$. Left: exact reconstruction sinogram. Right: $\Lambda$-tomography like sinogram.

Figures 8 and 7 show, in particular, *ladder* diagrams of the propagation of singularities in the direction $k = i$ and $k = 1$: the zeroth and second order terms of the Neumann series for $\widehat{\omega}^a$ are displayed, as well as the full series of the difference of the CGOs: $\widehat{\omega}_{\text{diff}} = (\widehat{\omega}^+ - \widehat{\omega}^-)/2$.

Figure 9 shows 2D reconstructions obtained using the new algorithm, with the two different inversion formulas. In Figure 10 we show the values of $\widehat{\omega}^a_{\text{diff}}(t, e^{i\varphi})$ for $t \in [-3, 3]$ and $\varphi \in [0, \pi]$. We borrow the term *sinogram* to describe these plots, because of the clear similarity with the sinograms of X-ray tomography.

## 11. Conclusion

We introduce a novel and robust method for recovering singularities of conductivities from electric boundary measurements. It is unique in its capability of recovering inclusions within inclusions in an unknown inhomogeneous background conductivity. This method provides a new connection between diffuse tomography (EIT) and classical parallel-beam X-ray tomography and filtered back-projection algorithms.

Full analysis of the higher order terms $\widehat{\omega}_n$ remains an open problem. We point out that there is a strong formal similarity between the multilinear operators $\mu \to \widehat{\omega}_n$ and multilinear operators considered by Brown [9], Nie and Brown [65] and Perry and Christ [66]. Indeed, any Born-type expansion naturally leads to expressions of this general form, with the places of the Cauchy and Beurling kernels for $\omega_n$ or $\widehat{\omega}_n$ here being taken by the appropriate Green's functions. However, an important feature here is that the singular coefficient in a Beltrami equation occurs in the top order term, rather than as a potential as in the works cited above. For the application needed in this setting, useful function space estimates do not seem to follow from existing results, which would require higher regularity of $\mu$, and this is an interesting topic for future investigation.

## References

[1] M. Assenheimer, O. Laver-Moskovitz, D. Malonek, D. Manor, U. Nahaliel, R. Nitzan, and A. Saad, *The T-SCAN technology: electrical impedance as a diagnostic tool for breast cancer detection*, Physiolog. Meas., **22** (2001), 1–8.

[2] K. Astala, T. Iwaniec, and G. Martin, *Elliptic partial differential equations and quasiconformal mappings in the plane*, Vol. 48, Princeton Math. Ser., Princeton University Press, Princeton, NJ, 2009.

[3] K. Astala, J. Mueller, L. Päivärinta, A. Perämäki, and S. Siltanen, *Direct electrical impedance tomography for nonsmooth conductivities*, Inverse Probl. Imag., **5** (2011), 531–549.

[4] K. Astala, J. Mueller, L. Päivärinta, and S. Siltanen, *Numerical computation of complex geometrical optics solutions to the conductivity equation*, Appl. and Comp. Harmonic Anal., **29** (2010), 391–403.

[5] K. Astala and L. Päivärinta, *A boundary integral equation for Calderón's inverse conductivity problem*, in Proc. 7th Intern. Conf. on Harmonic Analysis, Collectanea Mathematica, 2006.

[6] K. Astala and L. Päivärinta, *Calderón's inverse conductivity problem in the plane*, Annals of Math., **163** (2006), 265–299.

[7] K. Astala, L. Päivärinta, J. M. Reyes and S. Siltanen, *Nonlinear Fourier analysis for discontinuous conductivities: computational results*, Journal of Computational Physics **276** (2014), 74–91.

[8] G. Bal, *Hybrid inverse problems and internal functionals*, in *Inverse Problems and Applications: Inside Out, II*, Math. Sci. Res. Inst., **60**, Cambridge Univ. Pr., 2013.

[9] R. M. Brown, *Estimates for the scattering map associated with a two-dimensional first-order system*, J. Nonlinear Sci., **11** (2001), 459–471.

[10] R. M. Brown and G. Uhlmann, *Uniqueness in the inverse conductivity problem for nonsmooth conductivities in two dimensions*, Comm. Partial Diff. Eqns., **22** (1997), 1009–1027.

[11] M. Brühl and M. Hanke, *Numerical implementation of two non-iterative methods for locating inclusions by impedance tomography.* Inverse Problems, **16** (2000), 1029–1042.

[12] A.-P. Calderón, *On an inverse boundary value problem*, in Seminar on Numerical Analysis and its Applications to Continuum Physics (Rio de Janeiro, 1980), Soc. Brasil. Mat., Rio de Janeiro, 1980, 65–73.

[13] P. Caro and K. Rogers, *Global uniqueness for the Calderón problem with Lipschitz conductivities*, Forum of Math., Pi, **4** (2016), p. e2.

[14] T.F. Chan and X.-C. Tai, *Level set and total variation regularization for elliptic inverse problems with discontinuous coefficients*, Jour. Comp. Phys., **193** (2004), 40–66.

[15] M. Cheney, D. Isaacson, and J. C. Newell, *Electrical impedance tomography*, SIAM Rev., **41** (1999), 85–101.

[16] E.T. Chung, T.F. Chan, and X.-C. Tai, *Electrical impedance tomography using level set representation and total variational regularization* Jour. Comp. Phys., **205** (2005), 357 – 372.

[17] D. C. Dobson and F. Santosa, *An image enhancement technique for electrical impedance tomography*, Inverse Problems, **10** (1994), 317–334.

[18] J.J. Duistermaat and L. Hörmander, *Fourier integral operators, II*, Acta math., **128** (1971), 183–269.

[19] A. Faridani, E. L. Ritman and K. T. Smith, *Local tomography*, SIAM Jour. Appl. Math., **52** (1992), 459–484; and *Examples of local tomography*, SIAM Jour. Appl. Math., **52** (1992), 1193–1198.

[20] A. Faridani, D.V. Finch, E.L. Ritman, and K.T. Smith. Local tomography II. *SIAM Journal on Applied Mathematics*, 57(4):1095–1127, 1997.

[21] H. Garde and K. Knudsen *Sparsity prior for electrical impedance tomography with partial data*, Inverse Problems in Science and Engineering, (ahead-of-print):1–18, 2015.

[22] A. Greenleaf, M. Lassas and G. Uhlmann, *The Calderón problem for conormal potentials, I: Global uniqueness and reconstruction*, Comm. Pure Appl. Math., **56** (2003), 328–352.

[23] A. Greenleaf and G. Uhlmann, *Estimates for singular Radon transforms and pseudodifferential operators with singular symbols*, Jour. Func. Anal., **89** (1990), 220-232.

[24] A. Greenleaf and G. Uhlmann, *Local uniqueness for the Dirichlet-to-Neumann map via the two-plane transform*, Duke Math. Jour., **108** (2001), 599–617.

[25] V. Guillemin and G. Uhlmann, *Oscillatory integrals with singular symbols*, Duke Math. Jour., **48** (1981), 251-267.

[26] V. Guillemin, *On some results of Gelfand in integral geometry*, pp. 149-155, in *Proc. Sympos. Pure Math.*, **43**, Amer. Math. Soc., Providence, 1985.

[27] V. Guillemin and S. Sternberg, *Geometric Asymptotics*, Amer. Math. Soc., Providence.

[28] B. Haberman, *Uniqueness in Calderón's problem for conductivities with unbounded gradient*, Comm. Math. Phys., **340** 2015), 639–659.

[29] B. Haberman and D. Tataru, *Uniqueness in Calderón's problem with Lipschitz conductivities*, Duke Math. Jour., **162**, 497–516.

[30] S. Hamilton, C. Herrera, J. L. Mueller, and A. Von Herrmann, *A direct D-bar reconstruction algorithm for recovering a complex conductivity in 2-D*, Inverse Problems, **28** (2012), 095005.

[31] S. J. Hamilton, A. Hauptmann, and S. Siltanen, *A Data-Driven Edge-Preserving D-bar Method for Electrical Impedance Tomography*, Inverse Probl. Imag., **8** (2014), 1053–1072.

[32] S. J. Hamilton, J. M. Reyes, S. Siltanen, and X.-Q. Zhang *A Hybrid Segmentation and D-Bar Method for Electrical Impedance Tomography*, SIAM Jour. Imaging Sci. **9** (2016), 770–793.

[33] B. Harrach and M. Ullrich, *Monotonicity-based shape reconstruction in electrical impedance tomography*, SIAM Jour. Math. Anal., **45** (2013), 3382–3403.

[34] B. Harrach and M. Ullrich, *Resolution guarantees in electrical impedance tomography*, IEEE Trans. Medical Imaging, **34** (July, 2015),1513–1521.

[35] D.S. Holder, *Detection of cerebral ischaemia in the anaesthetised rat by impedance measurement with scalp electrodes: implications for non-invasive imaging of stroke by electrical impedance tomography*, Clinical Physics and Physiolog. Meas., **13** (1992), 63.

[36] D.S. Holder, *Electrical impedance tomography with cortical or scalp electrodes during global cerebral ischaemia in the anaesthetised rat*, Clinical Physics and Physiolog. Meas., **13** (1992), 87.

[37] L. Hörmander, *Fourier integral operators, I*, Acta math., **127** (1971), 79-183.

[38] L. Hörmander, *The Analysis of Linear Partial Differential Operators, IV.* Grundlehre der matematischen Wissenschaften, Springer, Berlin, 1983.

[39] M. Huhtanen and A. Perämäki, *Numerical solution of the R-linear Beltrami equation*, Math. of Comp., **81** (2012), 387–397.

[40] T. Ide, H. Isozaki, S. Nakata, S. Siltanen, and G. Uhlmann, *Probing for electrical inclusions with complex spherical waves*, Comm. Pure Appl. Math., **60** (2007), 1415–1442.

[41] M. Ikehata, *Reconstruction of the support function for inclusion from boundary measurements*, Jour. Inverse and Ill-Posed Problems, **8** (2000), 367–378.
[42] M. Ikehata and S. Siltanen, *Electrical impedance tomography and Mittag-Leffler's function*, Inverse Problems, **20** (2004), 1325–1348.
[43] M. Ikehata and S. Siltanen, *Numerical method for finding the convex hull of an inclusion in conductivity from boundary measurements*, Inverse Problems, **16** (2000), 1043–1052.
[44] D. Isaacson, J. Mueller, J. Newell, and S. Siltanen, *Imaging cardiac activity by the D-bar method for electrical impedance tomography*, Physiolog. Meas., **27** (2006), S43–S50.
[45] D. Isaacson, J. L. Mueller, J. C. Newell, and S. Siltanen, *Reconstructions of chest phantoms by the D-bar method for electrical impedance tomography*, IEEE Trans. on Med. Imag., **23** (2004), 821–828.
[46] B. Jin and P. Maass, *Sparsity regularization for parameter identification problems*, Inverse Problems, **28** (2012), 123001.
[47] J.P. Kaipio, V. Kolehmainen, E. Somersalo, and M. Vauhkonen, *Statistical inversion and monte carlo sampling methods in electrical impedance tomography*, Inverse Problems, **16** (2000), 1487–1522.
[48] S.E. Kim, *Calderón's problem for Lipschitz piecewise smooth conductivities*, Inverse Problems, **24** (2008), 055016.
[49] A. Kirsch, *Characterization of the shape of a scattering obstacle using the spectral data of the far field operator*, Inverse Problems, **14** (1998),1489.
[50] K. Knudsen, *A new direct method for reconstructing isotropic conductivities in the plane*, Physiolog. Meas., **24** (2003), pp. 391–403.
[51] K. Knudsen, M. Lassas, J. Mueller, and S. Siltanen, *D-bar method for electrical impedance tomography with discontinuous conductivities*, SIAM Jour. on Appl. Math., **67** (2007), p. 893.
[52] K. Knudsen, M. Lassas, J. Mueller, and S. Siltanen, *Regularized D-bar method for the inverse conductivity problem*, Inverse Probl. Imaging, **3** (2009), 599–624.
[53] K. Knudsen, J. Mueller, and S. Siltanen, *Numerical solution method for the dbar-equation in the plane*, Jour. Comp. Phys., **198** (2004), 500–517.
[54] K. Knudsen and A. Tamasan, *Reconstruction of less regular conductivities in the plane*, Comm. Partial Diff. Eqns., **29** (2004), 361–381.
[55] R. Kohn and M. Vogelius, *Determining conductivity by boundary measurements, II: Interior results*, Comm. Pure Appl. Math., **38** (1985), 643–667.
[56] P. Kuchment, *The Radon Transform and Medical Imaging*, CBMS-NSF Regional Conf. Ser. in Appl. Math, **85**, SIAM, Philadelphia, 2014.
[57] A. Lechleiter, *A regularization technique for the factorization method*, Inverse problems, **22** (2006), 1605.
[58] A. Lechleiter, N. Hyvönen, and H. Hakula, *The factorization method applied to the complete electrode model of impedance tomography*, SIAM Jour. Appl. Math., **68** (2008), 1097–1121.
[59] E. Malone, M. Jehl, S. Arridge, T. Betcke and D. Holder, *Stroke type differentiation using spectrally constrained multifrequency eit: evaluation of feasibility in a realistic head model*, Physiolog. meas., **35** (2014),1051.
[60] R. Melrose and G. Uhlmann, *Lagrangian intersection and the Cauchy problem*, Comm. Pure Appl. Math., **32** (1979), 483-519.

[61] G. Mendoza, Symbol calculus associated with intersecting Lagrangians, Comm. Partial Diff. Eqns., **7** (1982), 1035–1116.
[62] J. Mueller and S. Siltanen, *Direct reconstructions of conductivities from boundary measurements*, SIAM Jour. Sci. Comp., **24** (2003), 1232–1266.
[63] J. Mueller and S. Siltanen, *Linear and Nonlinear Inverse Problems with Practical Applications*, SIAM, Philadelphia, 2012.
[64] A. I. Nachman, *Global uniqueness for a two-dimensional inverse boundary value problem*, Ann. of Math., **143** (1996), 71–96.
[65] Z. Nie and R. M. Brown, *Estimates for a family of multi-linear forms*, J. Math. Anal. and Appl., **377** (2011), 79–87.
[66] P. Perry, *Global well-posedness and long-time asymptotics for the defocussing Davey-Stewartson II equation in $H^{1,1}(\mathbb{C})$*, with an appendix by M. Christ, arXiv.org:1110.5589v3 (2011,2015).
[67] D. Phong and E. Stein, Hilbert intergrals, singular integrals and Radon transforms, Acta math., **157** (1986), 99–157.
[68] L. Rondi and F. Santosa, *Enhanced electrical impedance tomography via the Mumford-Shah functional*, ESAIM Control Optim. Calc. Var., **6** (2001), 517–538.
[69] S. Siltanen, J. Mueller, and D. Isaacson, *An implementation of the reconstruction algorithm of A. Nachman for the 2-D inverse conductivity problem*, Inverse Problems, **16** (2000), 681–699.
[70] J. Sylvester and G. Uhlmann, A global uniqueness theorem for an inverse boundary value problem, Ann. of Math. **125** (1987), 153–169.
[71] N. M. Tanushev and L.A. Vese, *A piecewise-constant binary model for electrical impedance tomography*, Inverse Probl. Imag., **1** (2007), 423.
[72] G. Uhlmann and J.-N. Wang, *Reconstructing discontinuities using complex geometrical optics solutions*, SIAM J. Appl. Math., **68** (2008), 1026–1044.
[73] G. Vainikko, *Fast solvers of the Lippmann-Schwinger equation*, in Direct and inverse problems of mathematical physics (Newark, DE, 1997), Vol. 5 of Int. Soc. Anal. Appl. Comput., Kluwer Acad. Publ., Dordrecht, 2000, 423–440.
[74] K. van den Doel and U.M. Ascher *On level set regularization for highly ill-posed distributed parameter estimation problems*, Jour. Comp. Phys., **216** (2006), 707 – 723.
[75] Z. Zhou, G. Sato dos Santos, T. Dowrick, J. Avery, Z.L. Sun, H. Xu, and D.S. Holder, *Comparison of total variation algorithms for electrical impedance tomography* Physiolog. meas., **36** (2015),1193.

A. Greenleaf, Department of Mathematics, University of Rochester, Rochester, NY 14627

M. Lassas and S. Siltanen, Department of Mathematics, University of Helsinki, FIN-00014

M. Santacesaria, Department of Mathematics "Francesco Brioschi", Politecnico di Milano, 20133 Milano, Italy

G. Uhlmann, Department of Mathematics, University of Washington, Seattle, WA 98195